




METALOK INDUSTRIES
(AN ISO 9001: 2008 Certified Company)

**Manufacturer of wide range of
Fittings and Valves
For Instrumentation, Hydraulic
& Precise Industrial Applications**

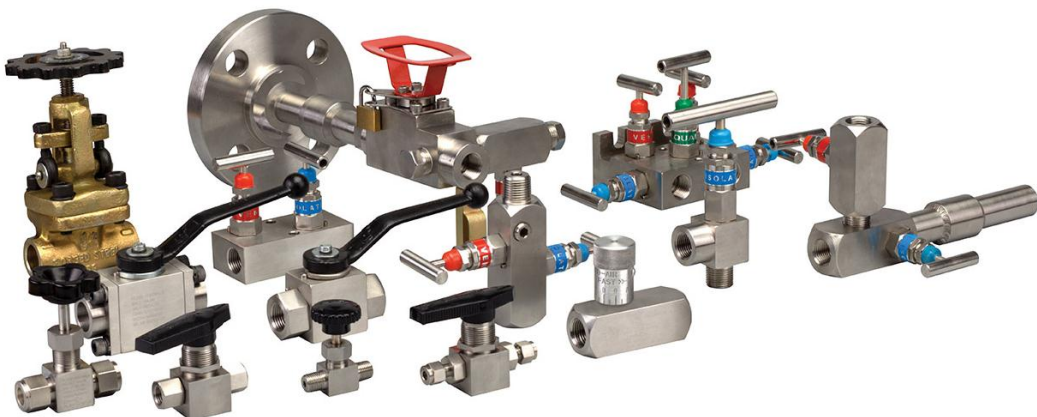

METALOK INDUSTRIES

sales@metalokindustries.com



M
E
T
A
L
O
K

I
N
D
U
S
T
R
I
E
S



METALOK

HIGH PRESSURE ADAPTERS AND COUPLINGS

10000 psi to 60,000 psi



Dimensions are for reference only and subject to change without notice.

















Warning for Your Safety

The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.




<p>1</p>	<p>1</p>	<p>2</p>
<p>Low Pressure LP Male to Low Pressure LP Male Adapter 10000 psi</p>	<p>Low Pressure LP Male to Male NPT Threads Adapter 10000 psi</p>	<p>Low Pressure LP Male to Male JIC Adapter 10000 psi</p>
<p>2</p>	<p>3</p>	<p>3</p>
<p>Medium Pressure MP Male to Low Pressure LP Male Adapter 15000 psi</p>	<p>Low Pressure LP Male to Type "M" Male Adapter 10000 psi</p>	<p>Medium Pressure MP To Low Pressure LP Adapter 15000 psi</p>
<p>4</p>	<p>4</p>	<p>5</p>
<p>Medium Pressure MP Male to Medium Pressure MP Male Adapter 15000 psi</p>	<p>Low Pressure LP Male to Type "M" Male Adapter 10000 psi</p>	<p>Medium Pressure MP Male to Male JIC Adapter 15000 psi</p>
<p>6</p>	<p>7</p>	<p>8</p>
<p>Medium Pressure MP Male to Medium Pressure MP Male Adapter 15000 psi</p>	<p>Medium Pressure MP Male to Male NPT Threads Adapter 15000 psi</p>	<p>Medium Pressure MP Male to Male JIC Adapter 15000 psi</p>
<p>8</p>	<p>9</p>	<p>9</p>
<p>High Pressure HP Male to Medium Pressure MP Male Adapter 40000 psi</p>	<p>Medium Pressure MP Male to Type "M" Male Adapter 15000 psi</p>	<p>High Pressure HP Male to High Pressure HP Male Adapter 40000 psi</p>
<p>10</p>	<p>11</p>	<p>11</p>
<p>High Pressure HP Male to Male NPT Threads Adapter 40000 psi</p>	<p>High Pressure HP Male to Male JIC Adapter 40000 psi</p>	<p>High Pressure HP Male to Type "M" Male Adapter 40000 psi</p>
<p>10</p>	<p>11</p>	<p>11</p>
<p>Type "M" Male to Medium Pressure MP Coned and Threaded Nipples Adapter 15000 psi</p>	<p>Coned and Threaded Nipples Adapter 40000 psi Type "M" Male to High Pressure HP</p>	<p>Medium Pressure MP Female to Low Pressure LP Female Adapter 15000 psi</p>




 <p>12</p>	 <p>13</p>	 <p>14</p>
<p>Medium Pressure MP Female to Female NPT Thread Coupling 15000 psi</p>	<p>High Pressure HP Female to Low Pressure LP Female Adapter 40000 psi</p>	<p>High Pressure HP Female to Female NPT Thread Coupling 40000 psi</p>
 <p>15</p>	 <p>15</p>	 <p>16</p>
<p>Low Pressure LP Female to Low Pressure LP Male Adapter 10000 psi</p>	<p>Low Pressure LP Female to Medium Pressure MP Male Adapter 15000 psi</p>	<p>Low Pressure LP Female to Medium Pressure MP Coned and Threaded Nipples Adapter 15000 psi</p>
 <p>17</p>	 <p>18</p>	 <p>19</p>
<p>Low Pressure LP Female to High Pressure HP Male Adapter 40000 psi</p>	<p>Low Pressure LP Female to High Pressure HP Coned and Threaded Nipples Adapter 40000 psi</p>	<p>Low Pressure LP Female to Type "M" Male Coupling 10000 psi</p>
 <p>19</p>	 <p>20</p>	 <p>20</p>
<p>Medium Pressure MP Female to Low Pressure Male LP Coupling 15000 psi</p>	<p>High Pressure HP Female to Type "M" Male Coupling 40000 psi</p>	<p>Female NPT Threads to Low Pressure LP Male Adapter 10000 psi</p>
 <p>21</p>	 <p>22</p>	 <p>22</p>
<p>Female NPT Threads to Medium Pressure MP Male Adapter 15000 psi</p>	<p>Female NPT Threads to Medium Pressure MP Coned and Threaded Nipple Adapter 15000psi</p>	<p>Female NPT Threads to High Pressure HP Male Adapter 40000 psi</p>
 <p>23</p>		
<p>Female NPT Threads to High Pressure Coned and Threaded Nipples</p>		

Low Pressure LP Male to Low Pressure LP Male Adapter 10000 PSI

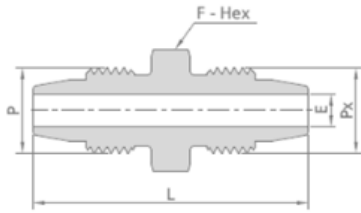

P-Type	Px-Connection Type	Ordering Number	Dimension, in. (mm)			Working Pressure psig (bar)
			L	F	E	
3/8 "-24	3/8 "-24	MILPLPM1	1.37 (34.9)	0.50 (12.7)	0.09 (2.4)	15000 (1034)
5/8 "-18	3/8 "-24	MILPLPM2	1.63 (41.3)	0.63 (15.9)	0.09 (2.4)	15000 (1034)
1/2 "-20	1/2 "-20	MILPLPM3	1.75 (44.5)	0.63 (15.9)	0.19 (4.8)	15000 (1034)
1/2 "-20	3/8 "-24	MILPLPM4	1.69 (42.9)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
5/8 "-18	1/2 "-20	MILPLPM5	1.87 (47.6)	0.75 (19.1)	0.19 (4.8)	15000 (1034)
5/8 "-18	5/8 "-18	MILPLPM6	1.87 (47.6)	0.75 (19.1)	0.25 (6.4)	15000 (1034)
13/16 "-16	3/8 "-24	MILPLPM7	1.81 (46.0)	0.94 (23.8)	0.09 (2.4)	15000 (1034)
13/16 "-16	1/2 "-20	MILPLPM8	2.00 (50.8)	0.94 (23.8)	0.19 (4.8)	15000 (1034)
13/16 "-16	5/8 "-18	MILPLPM9	2.00 (50.8)	0.94 (23.8)	0.25 (6.4)	15000 (1034)
13/16 "-16	13/16 "-16	MILPLPM10	2.06 (52.4)	0.94 (23.8)	0.37 (9.5)	15000 (1034)

Low Pressure LP Male to Male NPT Threads Adapter 10000 psi

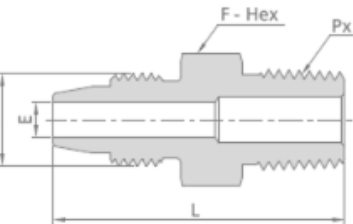

P-Type	Px-Connection	Ordering Number	Dimension, in. (mm)			Working Pressure psig
			L	F	E	
3/8 "-24	1/8 NPT	MILPM 1	1.19 (30.2)	0.50 (12.7)	0.09 (2.4)	15000 (1034)
3/8 "-24	1/4 NPT	MILPM 2	1.44 (36.5)	0.56 (14.3)	0.09 (2.4)	15000 (1034)
3/8 "-24	3/8 NPT	MILPM 3	1.50 (38.1)	0.69 (17.5)	0.09 (2.4)	15000 (1034)
3/8 "-24	1/2 NPT	MILPM 4	1.75 (44.5)	0.87 (22.2)	0.09 (2.4)	15000 (1034)
3/8 "-24	3/4 NPT	MILPM 5	1.81 (46.0)	1.06 (27.0)	0.09 (2.4)	10000 (690)
3/8 "-24	1 NPT	MILPM 6	2.13 (54.0)	1.37 (34.9)	0.09 (2.4)	10000 (690)
1/2 "-20	1/8 NPT	MILPM 7	1.44 (36.5)	0.63 (15.9)	0.19 (4.8)	15000 (1034)
1/2 "-20	1/4 NPT	MILPM 8	1.63 (41.3)	0.63 (15.9)	0.19 (4.8)	15000 (1034)
1/2 "-20	3/8 NPT	MILPM 9	1.63 (41.3)	0.63 (15.9)	0.19 (4.8)	15000 (1034)
1/2 "-20	1/2 NPT	MILPM 10	1.87 (47.6)	0.87 (22.2)	0.19 (4.8)	15000 (1034)
1/2 "-20	3/4 NPT	MILPM 11	1.94 (49.2)	1.06 (27.0)	0.19 (4.8)	10000 (690)
1/2 "-20	1 NPT	MILPM 12	2.25 (57.2)	1.37 (34.9)	0.19 (4.8)	10000 (690)

Dimensions are for reference only and subject to change without notice.

Warning for Your Safety


The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.



Low Pressure LP Male to Male JIC Adapter 10000 psi




P-Type	Px-Connection	Ordering Number	Dimension, in. (mm)			Working Pressure psig
			L	F	E	
3/8 "-24	1/4 JIC	MILPJIC 1	1.37 (34.9)	0.50 (12.7)	0.09 (2.4)	15000 (1034)
3/8 "-24	3/8 JIC	MILPJIC 2	1.44 (36.5)	0.63 (15.9)	0.09 (2.4)	15000 (1034)
3/8 "-24	1/2 JIC	MILPJIC 3	1.63 (41.3)	0.81 (20.6)	0.09 (2.4)	15000 (1034)
3/8 "-24	5/8 JIC	MILPJIC 4	1.75 (44.5)	0.94 (23.8)	0.09 (2.4)	15000 (1034)
3/8 "-24	3/4 JIC	MILPJIC 5	1.94 (49.2)	1.13 (28.6)	0.09 (2.4)	15000 (1034)
3/8 "-24	1 JIC	MILPJIC 6	2.06 (52.4)	1.37 (34.9)	0.09 (2.4)	15000 (1034)
1/2 "-20	1/4 JIC	MILPJIC 7	1.63 (41.3)	0.63 (15.9)	0.17 (4.4)	15000 (1034)
1/2 "-20	3/8 JIC	MILPJIC 8	1.63 (41.3)	0.63 (15.9)	0.19 (4.8)	15000 (1034)
1/2 "-20	1/2 JIC	MILPJIC 9	1.75 (44.5)	0.81 (20.6)	0.19 (4.8)	15000 (1034)
1/2 "-20	5/8 JIC	MILPJIC 10	1.94 (49.2)	0.94 (23.8)	0.19 (4.8)	15000 (1034)
1/2 "-20	3/4 JIC	MILPJIC 11	2.06 (52.4)	1.13 (28.6)	0.19 (4.8)	15000 (1034)
1/2 "-20	1 JIC	MILPJIC 12	2.25 (57.2)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
5/8 "-18	1/4 JIC	MILPJIC 13	1.69 (42.9)	0.75 (19.1)	0.17 (4.4)	15000 (1034)
5/8 "-18	3/8 JIC	MILPJIC 14	1.69 (42.9)	0.75 (19.1)	0.23 (5.8)	15000 (1034)
5/8 "-18	1/2 JIC	MILPJIC 15	1.81 (46.0)	0.81 (20.6)	0.25 (6.4)	15000 (1034)
5/8 "-18	5/8 JIC	MILPJIC 16	1.94 (49.2)	0.94 (23.8)	0.25 (6.4)	15000 (1034)
5/8 "-18	3/4 JIC	MILPJIC 17	2.13 (54.0)	1.13 (28.6)	0.25 (6.4)	15000 (1034)
5/8 "-18	1 JIC	MILPJIC 18	2.25 (57.2)	1.37 (34.9)	0.25 (6.4)	15000 (1034)
13/16 "-16	1/4 JIC	MILPJIC 19	1.81 (46.0)	0.94 (23.8)	0.17 (4.4)	15000 (1034)
13/16 "-16	3/8 JIC	MILPJIC 20	1.81 (46.0)	0.94 (23.8)	0.23 (5.8)	15000 (1034)
13/16 "-16	1/2 JIC	MILPJIC 21	1.94 (49.2)	0.94 (23.8)	0.31 (8.0)	15000 (1034)
13/16 "-16	5/8 JIC	MILPJIC 22	2.00 (50.8)	0.94 (23.8)	0.37 (9.4)	15000 (1034)
13/16 "-16	3/4 JIC	MILPJIC 23	2.19 (55.6)	1.13 (28.6)	0.37 (9.5)	15000 (1034)
13/16 "-16	1 JIC	MILPJIC 24	2.31 (58.7)	1.37 (34.9)	0.37 (9.5)	15000 (1034)

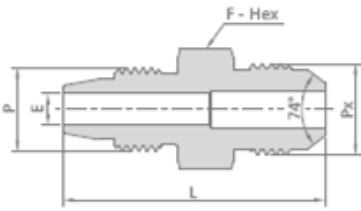

Medium Pressure MP Male to Low Pressure LP Male Adapter 15000 psi

Pconnection Type		Ordering Number	Dimension in (mm)			Working psig (bar)
			L	F	E	
16-20	3/8_24	MIMPLP 1	1.50 (38.1)	0.50 (12.7)	0.09 (2.4)	15000 (1034)
16-20	1/2_20	MIMPLP 2	1.75 (44.5)	0.63 (15.9)	0.11 (2.8)	15000 (1034)
16-20	5/8_18	MIMPLP 3	1.81 (46.0)	0.75 (19.1)	0.11 (2.8)	15000 (1034)
16-20	13/16-16	MIMPLP 4	1.94 (49.2)	0.94 (23.8)	0.11 (2.8)	15000 (1034)
16-18	3/8_24	MIMPLP 5	1.75 (44.5)	0.63 (15.9)	0.09 (2.4)	15000 (1034)
16-18	1/2_20	MIMPLP 6	1.87 (47.6)	0.63 (15.9)	0.19 (4.8)	15000 (1034)

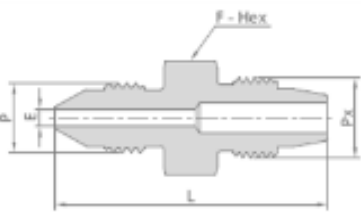

Dimensions are for reference only and subject to change without notice.

Warning for Your Safety

The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.


ADAPTER AND COUPLINGS



M
E
T
A
L
O
K

I
N
D
U
S
T
R
I
E
S

Low Pressure LP Male to Type "M" Male Adapter 10000 psi

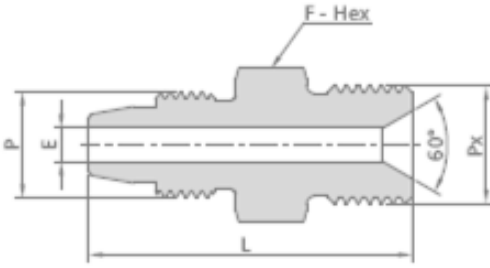


Pconnection Type	Pconnection Type	Ordering Number	Dimension, in. (mm)			Working Pressure psig (bar)
			L	F	E	
3/8 "-24	9/16-18	MILPMA 1	1.38 (35.1)	0.63 (15.9)	0.09 (2.4)	15000 (1034)
3/8 "-24	3/4 "-16	MILPMA 2	1.55 (39.4)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
3/8 "-24	7/8 "-16	MILPMA 3	1.76 (44.6)	1.00 (25.4)	0.09 (2.4)	15000 (1034)
3/8 "-24	1 "-12	MILPMA 4	1.64 (41.7)	1.00 (25.4)	0.09 (2.4)	15000 (1034)
3/8 "-24	1-5/6 "-12	MILPMA 5	1.76 (44.7)	1.37 (34.9)	0.09 (2.4)	15000 (1034)
1/2 "-20	9/6 "-18	MILPMA 6	1.54 (39.0)	0.63 (15.9)	0.09 (2.4)	15000 (1034)
1/2 "-20	3/4 "-16	MILPMA 7	1.70 (43.3)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
1/2 "-20	7/8 "-16	MILPMA 8	1.91 (48.5)	1.00 (25.4)	0.15 (3.8)	15000 (1034)
1/2 "-20	1 "-12	MILPMA 9	1.80 (45.6)	1.00 (25.4)	0.19 (4.8)	15000 (1034)
1/2 "-20	1-5/6 "-12	MILPMA 10	1.91 (48.6)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
5/8 "-18	9/6 "-18	MILPMA 11	1.63 (41.3)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
5/8 "-18	3/4 "-16	MILPMA 12	1.76 (44.6)	0.75 (19.1)	0.25 (6.4)	15000 (1034)
5/8 "-18	7/8 "-16	MILPMA 13	1.95 (49.6)	1.00 (25.4)	0.15 (3.8)	15000 (1034)
5/8 "-18	1 "-12	MILPMA 14	1.85 (46.9)	1.00 (25.4)	0.25 (6.4)	15000 (1034)
5/8 "-18	1-5/6 "-12	MILPMA 15	1.96 (49.9)	1.37 (34.9)	0.25 (6.4)	15000 (1034)
13/16 "-16	9/6 "-18	MILPMA 16	1.73 (44.0)	0.94 (23.8)	0.09 (2.4)	15000 (1034)
13/16 "-16	3/4 "-16	MILPMA 17	1.86 (47.3)	0.94 (23.8)	0.29 (7.4)	15000 (1034)
13/16 "-16	7/8 "-16	MILPMA 18	2.01 (51.1)	1.00 (25.4)	0.15 (3.8)	15000 (1034)
13/16 "-16	1 "-12	MILPMA 19	1.90 (48.2)	1.00 (25.4)	0.37 (9.5)	15000 (1034)
13/16 "-16	1-5/6 "-12	MILPMA 20	2.02 (51.2)	1.37 (34.9)	0.37 (9.5)	15000 (1034)

Medium Pressure MP To Low Pressure LP Adapter 15000 psi


Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working psig (bar)
			L	F	E	
16-18	3/8_24	MIMP 1	1.94 (49.2)	0.75 (19.1)	0.20 (5.2)	15000 (1034)
16-18	13/16_16	MIMP 2	2.06 (52.4)	0.94 (23.8)	0.20 (5.2)	15000 (1034)
16-16	3/8_24	MIMP 3	2.00 (50.8)	0.94 (23.8)	0.09 (2.4)	15000 (1034)
16-16	1/2_20	MIMP 4	2.19 (55.6)	0.94 (23.8)	0.19 (4.8)	15000 (1034)
16-16	5/8_18	MIMP 5	2.19 (55.6)	0.94 (23.8)	0.25 (6.4)	15000 (1034)
16-16	13/16_16	MIMP 6	2.25 (57.2)	0.94 (23.8)	0.31 (7.9)	15000 (1034)
3/4 "-14	3/8_24	MIMP 7	2.25 (57.2)	1.19 (30.2)	0.09 (2.4)	15000 (1034)
3/4 "-14	1/2_20	MIMP 8	2.44 (61.9)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
3/4 "-14	5/8_18	MIMP 9	2.50 (63.5)	1.19 (30.2)	0.25 (6.4)	15000 (1034)
3/4 "-14	13/16_16	MIMP 10	2.50 (63.5)	1.19 (30.2)	0.37 (9.5)	15000 (1034)
1-3/8-12	3/8_24	MIMP 11	2.81 (71.4)	1.50 (38.1)	0.09 (2.4)	15000 (1034)
1-3/8-12	1/2_20	MIMP 12	3.00 (76.2)	1.50 (38.1)	0.19 (4.8)	15000 (1034)
1-3/8-12	5/8_18	MIMP 13	3.06 (77.8)	1.50 (38.1)	0.37 (9.5)	15000 (1034)
1-3/8-12	13/16_16	MIMP 14	3.06 (77.8)	1.50 (38.1)	0.37 (9.5)	15000 (1034)

ADAPTER AND COUPLINGS



Medium Pressure MP Male to Medium Pressure MP Male Adapter 15000 psi

P Connection Type	Pconnection Type	Ordering Number	Dimension, in. (mm)			Working Pressure psig (bar)
			L	F	E	
16-20	7/16_20	MIMPA 1	1.63 (41.3)	0.50 (12.7)	0.11 (2.8)	20000 (1379)
16-18	7/16_20	MIMPA 2	1.87 (47.6)	0.63 (15.9)	0.11 (2.8)	20000 (1379)
16-18	7/16_20	MIMPA 3	2.00 (50.8)	0.63 (15.9)	0.20 (5.2)	20000 (1379)
16-16	7/16_20	MIMPA 4	2.13 (54.0)	0.94 (23.8)	0.11 (2.8)	20000 (1379)
16-16	9/16-18	MIMPA 5	2.31 (58.7)	0.94 (23.8)	0.20 (5.2)	20000 (1379)
16-16	13/16_16	MIMPA 6	2.50 (63.5)	0.94 (23.8)	0.31 (7.9)	20000 (1379)
3/4 "-14	7/16_20	MIMPA 7	2.44 (61.9)	1.19 (30.2)	0.11 (2.8)	20000 (1379)
3/4 "-14	9/16_18	MIMPA 8	2.56 (65.1)	1.19 (30.2)	0.20 (5.2)	20000 (1379)
3/4 "-14	13/16_16	MIMPA 9	2.75 (69.9)	1.19 (30.2)	0.31 (7.9)	20000 (1379)
3/4 "-14	3/4_14	MIMPA 10	2.94 (74.6)	1.19 (30.2)	0.44 (11.1)	20000 (1379)
1-3/8-12	7/16_20	MIMPA 11	3.00 (76.2)	1.50 (38.1)	0.11 (2.8)	20000 (1379)
1-3/8-12	9/16-18	MIMPA 12	3.13 (79.4)	1.50 (38.1)	0.20 (5.2)	20000 (1379)
1-3/8-12	13/16_16	MIMPA 13	3.31 (84.2)	1.50 (38.1)	0.31 (7.9)	20000 (1379)
1-3/8-12	3/4_14	MIMPA 14	3.44 (87.4)	1.50 (38.1)	0.44 (11.1)	20000 (1379)
1-3/8-12	1-3/8_12	MIMPA 15	3.94 (100.2)	1.50 (38.1)	0.56 (14.3)	20000 (1379)



Medium Pressure MP Male to Male NPT Threads Adapter 15000 psi

P Connection Type	PX Connection Type	Ordering Number	Dimensions			Working Pressure
			L	F	E	
16-20	1/8 NPT	MIMPA 1	1.37 (34.9)	0.50 (12.7)	0.11 (2.8)	15000 (1034)
16-20	1/4 NPT	MIMPA 2	1.56 (39.7)	0.56 (14.3)	0.11 (2.8)	15000 (1034)
16-20	3/8 NPT	MIMPA 3	1.63 (41.3)	0.69 (17.5)	0.11 (2.8)	15000 (1034)
16-20	1/2 NPT	MIMPA 4	1.87 (47.6)	0.87 (22.2)	0.11 (2.8)	15000 (1034)
16-20	3/4 NPT	MIMPA 5	1.94 (49.2)	1.06 (27.0)	0.11 (2.8)	15000 (1034)
16-20	1 NPT	MIMPA 6	2.25 (57.2)	1.37 (34.9)	0.11 (2.8)	15000 (1034)
16-18	1/8 NPT	MIMPA 7	1.56 (39.7)	0.63 (15.9)	0.19 (4.8)	15000 (1034)
16-18	1/4 NPT	MIMPA 8	1.75 (44.5)	0.63 (15.9)	0.20 (5.2)	15000 (1034)
16-18	3/8 NPT	MIMPA 9	1.75 (44.5)	0.69 (17.5)	0.20 (5.2)	15000 (1034)
16-18	1/2 NPT	MIMPA 10	2.00 (50.8)	0.87 (22.2)	0.20 (5.2)	15000 (1034)
16-18	3/4 NPT	MIMPA 11	2.06 (52.4)	1.06 (27.0)	0.20 (5.2)	15000 (1034)
16-18	1 NPT	MIMPA 12	2.37 (60.3)	1.37 (34.9)	0.20 (5.2)	15000 (1034)
16-16	1/8 NPT	MIMPA 13	1.87 (47.6)	0.94 (23.8)	0.19 (4.8)	15000 (1034)
16-16	1/4 NPT	MIMPA 14	2.06 (52.4)	1.06 (27.0)	0.25 (6.4)	15000 (1034)
16-16	3/8 NPT	MIMPA 15	2.06 (52.4)	1.37 (34.9)	0.31 (7.9)	15000 (1034)
16-16	1/2 NPT	MIMPA 16	2.25 (57.2)	0.94 (23.8)	0.31 (7.9)	15000 (1034)
16-16	3/4 NPT	MIMPA 17	2.31 (58.7)	0.94 (23.8)	0.31 (7.9)	15000 (1034)
16-16	1 NPT	MIMPA 18	2.56 (65.1)	0.94 (23.8)	0.31 (7.9)	15000 (1034)
3/4.14	1/8 NPT	MIMPA 19	2.13 (54.0)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
3/4.14	1/4 NPT	MIMPA 20	2.31 (58.7)	1.37 (34.9)	0.25 (6.4)	10000 (690)
3/4.14	3/8 NPT	MIMPA 21	2.31 (58.7)	1.19 (30.2)	0.31 (7.9)	10000 (690)
3/4.14	1/2 NPT	MIMPA 22	2.50 (63.5)	1.19 (30.2)	0.38 (9.6)	10000 (690)
3/4.14	3/4 NPT	MIMPA 23	2.50 (63.5)	1.19 (30.2)	0.44 (11.1)	10000 (690)
3/4.14	1 NPT	MIMPA 24	2.75 (69.9)	1.19 (30.2)	0.44 (11.1)	10000 (690)
1-3/8-12	1/8 NPT	MIMPA 25	2.69 (68.3)	1.50 (38.1)	0.19 (4.8)	10000 (690)
1-3/8-12	1/4 NPT	MIMPA 26	2.81 (71.4)	1.50 (38.1)	0.25 (6.4)	10000 (690)
1-3/8-12	3/8 NPT	MIMPA 27	2.81 (71.4)	1.50 (38.1)	0.31 (7.9)	10000 (690)
1-3/8-12	1/2 NPT	MIMPA 28	3.06 (77.8)	1.50 (38.1)	0.38 (9.6)	10000 (690)
1-3/8-12	3/4 NPT	MIMPA 29	3.06 (77.8)	1.50 (38.1)	0.56 (14.3)	10000 (690)
1-3/8-12	1 NPT	MIMPA 30	3.25 (82.6)	1.50 (38.1)	0.56 (14.3)	15000 (1034)




M
E
T
A
L
O
K

I
N
D
U
S
T
R
I
E
S

ADAPTER AND COUPLINGS

Medium Pressure MP Male to Male JIC Adapter 15000 psi

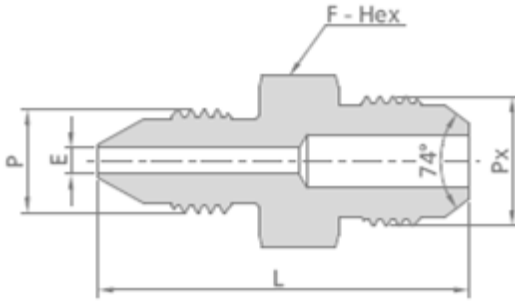


M
E
T
A
L
O
K

I
N
D
U
S
T
R
I
E
S

Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
16-20	1/4 JIC	MIMPJIC 1	1.50 (38.1)	0.50 (12.7)	0.11 (2.8)	20000 (1379)
16-20	3/8 JIC	MIMPJIC 2	1.63 (41.3)	0.63 (15.9)	0.11 (2.8)	20000 (1379)
16-20	1/2 JIC	MIMPJIC 3	1.75 (44.5)	0.81 (20.6)	0.11 (2.8)	20000 (1379)
16-20	5/8 JIC	MIMPJIC 4	1.87 (47.6)	0.94 (23.8)	0.11 (2.8)	20000 (1379)
16-20	3/4 JIC	MIMPJIC 5	2.06 (52.4)	1.13 (28.6)	0.11 (2.8)	20000 (1379)
16-20	1 JIC	MIMPJIC 6	2.19 (55.6)	1.37 (34.9)	0.11 (2.8)	20000 (1379)
16-18	1/4 JIC	MIMPJIC 7	1.75 (44.5)	0.94 (23.8)	0.17 (4.4)	20000 (1379)
16-16	3/8 JIC	MIMPJIC 8	1.75 (44.5)	1.13 (28.6)	0.20 (5.2)	20000 (1379)
16-18	1/2 JIC	MIMPJIC 9	1.87 (47.6)	1.37 (34.9)	0.20 (5.2)	20000 (1379)
16-18	5/8 JIC	MIMPJIC 10	2.06 (52.4)	0.94 (23.8)	0.20 (5.2)	20000 (1379)
16-18	3/4 JIC	MIMPJIC 11	2.25 (57.2)	0.94 (23.8)	0.20 (5.2)	20000 (1379)
16-18	1 JIC	MIMPJIC 12	2.37 (60.3)	0.94 (23.8)	0.20 (5.2)	20000 (1379)
16-18	1/4 JIC	MIMPJIC 13	2.00 (50.8)	1.37 (34.9)	0.17 (4.4)	20000 (1379)
16-16	3/8 JIC	MIMPJIC 14	2.06 (52.4)	1.19 (30.2)	0.23 (5.8)	20000 (1379)
16-16	1/2 JIC	MIMPJIC 15	2.13 (54.0)	1.19 (30.2)	0.31 (7.9)	20000 (1379)
16-16	5/8 JIC	MIMPJIC 16	2.25 (57.2)	1.19 (30.2)	0.31 (7.9)	20000 (1379)
16-16	3/4 JIC	MIMPJIC 17	2.44 (61.9)	1.19 (30.2)	0.31 (7.9)	20000 (1379)
16-16	1 JIC	MIMPJIC 18	2.56 (65.1)	1.19 (30.2)	0.31 (7.9)	20000 (1379)
3/4 "-14	1/4 JIC	MIMPJIC 19	2.31 (58.7)	0.63 (15.9)	0.17 (4.4)	20000 (1379)
3/4 "-14	3/8 JIC	MIMPJIC 20	2.31 (58.7)	0.63 (15.9)	0.23 (5.8)	20000 (1379)
3/4 "-14	1/2 JIC	MIMPJIC 21	2.37 (60.3)	0.81 (20.6)	0.31 (7.9)	15000 (1034)
3/4 "-14	5/8 JIC	MIMPJIC 22	2.50 (63.5)	0.94 (23.8)	0.37 (9.4)	15000 (1034)
3/4 "-14	3/4 JIC	MIMPJIC 23	2.63 (66.7)	1.13 (28.6)	0.44 (11.1)	15000 (1034)
3/4 "-14	1 JIC	MIMPJIC 24	2.69 (68.3)	1.37 (34.9)	0.44 (11.1)	15000 (1034)
1-3/8-12	1/4 JIC	MIMPJIC 25	2.81 (71.4)	1.50 (38.1)	0.17 (4.4)	15000 (1034)
1-3/8-12	3/8 JIC	MIMPJIC 26	2.81 (71.4)	1.50 (38.1)	0.23 (5.8)	15000 (1034)
1-3/8-12	1/2 JIC	MIMPJIC 27	2.94 (74.6)	1.50 (38.1)	0.31 (7.9)	15000 (1034)
1-3/8-12	5/8 JIC	MIMPJIC 28	3.06 (77.8)	1.50 (38.1)	0.37 (9.4)	15000 (1034)
1-3/8-12	3/4 JIC	MIMPJIC 29	3.13 (79.4)	1.50 (38.1)	0.46 (11.6)	15000 (1034)
1-3/8-12	1 JIC	MIMPJIC 30	3.19 (81.0)	1.50 (38.1)	0.56 (14.3)	15000 (1034)

ADAPTER AND COUPLINGS




High Pressure HP Male to Medium Pressure MP Male Adapter 40000 psi



M
E
T
A
L
O
K

I
N
D
U
S
T
R
I
E
S


Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
9/16-18	7/16-20	MIHPM 1	1.69 (42.9)	0.63 (15.9)	0.08 (2.1)	20000 (1379)
9/16-18	9/16-18	MIHPM 2	2.06 (52.4)	0.63 (15.9)	0.08 (2.1)	20000 (1379)
9/16-18	13/16-16	MIHPM 3	2.37 (60.3)	0.94 (23.8)	0.08 (2.1)	20000 (1379)
9/16-18	3/4 "-14	MIHPM 4	2.94 (74.6)	1.19 (30.2)	0.08 (2.1)	20000 (1379)
9/16-18	1-3/8-12	MIHPM 5	2.00 (50.8)	1.50 (38.1)	0.08 (2.1)	20000 (1379)
9/16-18	7/16-20	MIHPM 6	2.13 (54.0)	0.81 (20.6)	0.11 (2.4)	20000 (1379)
3/4 "-16	9/16-18	MIHPM 7	2.37 (60.3)	0.81 (20.6)	0.13 (3.2)	20000 (1379)
3/4 "-16	13/16-16	MIHPM 8	2.63 (66.7)	0.94 (23.8)	0.13 (3.2)	20000 (1379)
3/4 "-16	3/4 "-14	MIHPM 9	3.13 (79.4)	1.19 (30.2)	0.13 (3.2)	20000 (1379)
3/4 "-16	1-3/8-12	MIHPM 10	2.25 (57.2)	1.50 (38.1)	0.13 (3.2)	20000 (1379)
1-1/8-12	7/16-20	MIHPM 11	2.44 (61.9)	1.19 (30.2)	0.11 (2.4)	20000 (1379)
1-1/8-12	9/16-18	MIHPM 12	2.63 (66.7)	1.50 (38.1)	0.19 (4.8)	20000 (1379)
1-1/8-12	13/16-16	MIHPM 13	3.15 (79.9)	1.19 (30.2)	0.19 (4.8)	20000 (1379)
1-1/8-12	3/4 "-14	MIHPM 14	3.31 (84.2)	1.19 (30.2)	0.19 (4.8)	20000 (1379)
1-1/8-12	1-3/8-12	MIHPM 15	1.81 (46.0)	1.19 (30.2)	0.19 (4.8)	20000 (1379)

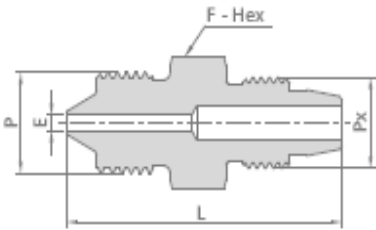

High Pressure HP Male to Low Pressure LP Male Adapter 40000 psi

Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
16/18	3/8 "-24	MILP 1	1.50 (38.1)	0.63 (15.9)	0.08 (2.1)	15000 (1034)
16/18	1/2 "-20	MILP 2	1.69 (42.9)	0.63 (15.9)	0.08 (2.1)	15000 (1034)
16/18	5/8 "-18	MILP 3	1.75 (44.5)	0.75 (19.1)	0.08 (2.1)	15000 (1034)
16/18	13/16-16	MILP 4	1.87 (47.6)	0.94 (23.8)	0.08 (2.1)	15000 (1034)
3/4 "-16	3/8 "-24	MILP 5	1.81 (46.0)	0.81 (20.6)	0.09 (2.4)	15000 (1034)
3/4 "-16	1/2 "-20	MILP 6	2.00 (50.8)	0.81 (20.6)	0.13 (3.2)	15000 (1034)
3/4 "-16	5/8 "-18	MILP 7	2.06 (52.4)	0.81 (20.6)	0.13 (3.2)	15000 (1034)
3/4 "-16	13/16-16	MILP 8	2.13 (54.0)	0.94 (23.8)	0.13 (3.2)	15000 (1034)
1-1/8-12	3/8 "-24	MILP 9	2.13 (54.0)	1.19 (30.2)	0.09 (2.4)	15000 (1034)
1-1/8-12	1/2 "-20	MILP 10	2.31 (58.7)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
1-1/8-12	5/8 "-18	MILP 10	2.31 (58.7)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
1-1/8-12	13/16-16	MILP 12	2.37 (60.3)	1.19 (30.2)	0.19 (4.8)	15000 (1034)

Medium Pressure MP Male to Type "M" Male Adapter 15000 psi

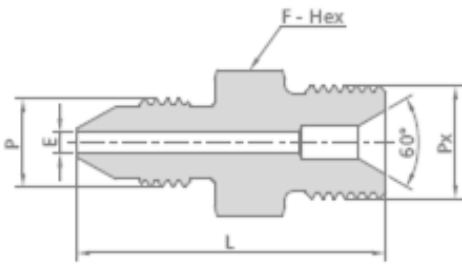

Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
16-20	16-18	MI-MPTM1	1.52 (38.7)	0.63 (15.9)	0.09 (2.4)	20000 (1379)
16-20	3/4 "-16	MI-MPTM2	1.69 (43.0)	0.75 (19.1)	0.11 (2.8)	20000 (1379)
16-20	7/8 "-14	MI-MPTM3	1.90 (48.2)	1.00 (25.4)	0.11 (2.8)	20000 (1379)
16-20	1 "-12	MI-MPTM4	1.78 (45.3)	1.00 (25.4)	0.11 (2.8)	20000 (1379)
16-20	1-5/16-12	MI-MPTM5	1.90 (48.3)	1.37 (34.9)	0.11 (2.8)	20000 (1379)
9/16-18	16-18	MI-MPTM6	1.67 (42.4)	0.63 (15.9)	0.09 (2.4)	20000 (1379)
9/16-18	3/4 "-16	MI-MPTM7	1.84 (46.7)	0.75 (19.1)	0.20 (5.2)	20000 (1379)
9/16-18	7/8 "-14	MI-MPTM8	2.04 (51.9)	1.00 (25.4)	0.15 (3.8)	20000 (1379)
9/16-18	1 "-12	MI-MPTM9	1.93 (49.0)	1.00 (25.4)	0.20 (5.2)	20000 (1379)
9/16-18	1-5/16-12	MI-MPTM10	2.05 (52.0)	1.37 (34.9)	0.20 (5.2)	20000 (1379)
13/16-16	16-18	MI-MPTM11	1.95 (49.6)	0.94 (23.8)	0.09 (2.4)	20000 (1379)
13/16-16	3/4 "-16	MI-MPTM12	2.08 (52.9)	0.94 (23.8)	0.29 (7.4)	20000 (1379)
13/16-16	7/8 "-14	MI-MPTM13	2.23 (56.7)	1.00 (25.4)	0.15 (3.8)	20000 (1379)
13/16-16	1 "-12	MI-MPTM14	2.12 (53.8)	1.00 (25.4)	0.31 (7.9)	20000 (1379)
13/16-16	1-5/16-12	MI-MPTM15	2.24 (56.8)	1.37 (34.9)	0.31 (7.9)	20000 (1379)
3/4 "-14	16-18	MI-MPTM16	2.22 (56.3)	1.19 (30.2)	0.09 (2.4)	20000 (1379)
3/4 "-14	3/4 "-16	MI-MPTM17	2.35 (59.6)	1.19 (30.2)	0.29 (7.4)	20000 (1379)
3/4 "-14	7/8 "-14	MI-MPTM18	2.47 (62.8)	1.19 (30.2)	0.15 (3.8)	20000 (1379)
3/4 "-14	1 "-12	MI-MPTM19	2.36 (59.9)	1.19 (30.2)	0.39 (10.0)	20000 (1379)
3/4 "-14	1-5/16-12	MI-MPTM20	2.41 (61.1)	1.37 (34.9)	0.44 (11.1)	20000 (1379)
1-3/8-12	16-18	MI-MPTM21	2.77 (70.3)	1.50 (38.1)	0.09 (2.4)	20000 (1379)
1-3/8-12	3/4 "-16	MI-MPTM22	2.90 (73.6)	1.50 (38.1)	0.29 (7.4)	20000 (1379)
1-3/8-12	7/8 "-14	MI-MPTM23	3.02 (76.8)	1.50 (38.1)	0.15 (3.8)	20000 (1379)
1-3/8-12	1 "-12	MI-MPTM24	2.91 (73.9)	1.50 (38.1)	0.39 (10.0)	20000 (1379)
1-3/8-12	1-5/16-12	MI-MPTM25	2.89 (73.3)	1.50 (38.1)	0.56 (14.3)	20000 (1379)


Dimensions are for reference only and subject to change without notice.

Warning for Your Safety

The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.




High Pressure HP Male to High Pressure HP Male Adapter 40000 psi




Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
1-1/812	9/16-18	MIHPM 1	1.63 (41.3)	0.63 (15.9)	0.08 (2.1)	60000 (4137)
3/4 "-16	9/16-18	MIHPM 2	1.94 (49.2)	0.81 (20.6)	0.08 (2.1)	60000 (4137)
3/4 "-16	3/4 "-16	MIHPM 3	2.19 (55.6)	0.81 (20.6)	0.13 (3.2)	60000 (4137)
1-1/812	9/16-18	MIHPM 4	2.19 (55.6)	1.19 (30.2)	0.08 (2.1)	60000 (4137)
1-1/812	3/4 "-16	MIHPM 5	2.50 (63.5)	1.19 (30.2)	0.13 (3.2)	60000 (4137)
9/16-18	1-1/812	MIHPM 6	2.63 (66.7)	1.19 (30.2)	0.19 (4.8)	60000 (4137)

High Pressure HP Male to Male NPT Threads Adapter 40000 psi




Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
9/16-8	1/8 NPT	MIHPA 1	1.37 (34.9)	0.63 (15.9)	0.08 (2.1)	15000 (1034)
9/16-8	1/4 NPT	MIHPA 2	1.56 (39.7)	0.69 (17.5)	0.08 (2.1)	15000 (1034)
9/16-8	3/8 NPT	MIHPA 2	1.56 (39.7)	0.87 (22.2)	0.08 (2.1)	15000 (1034)
9/16-8	1/2 NPT	MIHPA 3	1.81 (46.0)	1.06 (27.0)	0.08 (2.1)	15000 (1034)
9/16-8	3/4 NPT	MIHPA 3	1.87 (47.6)	1.37 (34.9)	0.08 (2.1)	15000 (1034)
9/16-8	1 NPT	MIHPA 4	2.19 (55.6)	0.81 (20.6)	0.08 (2.1)	15000 (1034)
3/4 "-16	1/8 NPT	MIHPA 4	1.69 (42.9)	0.87 (22.2)	0.13 (3.2)	15000 (1034)
3/4 "-16	1/4 NPT	MIHPA 5	1.87 (47.6)	1.06 (27.0)	0.13 (3.2)	15000 (1034)
3/4 "-16	3/8 NPT	MIHPA 5	1.87 (47.6)	1.37 (34.9)	0.13 (3.2)	15000 (1034)
3/4 "-16	1/2 NPT	MIHPA 6	2.06 (52.4)	0.81 (20.6)	0.13 (3.2)	15000 (1034)
3/4 "-16	3/4 NPT	MIHPA 6	2.13 (54.0)	0.81 (20.6)	0.13 (3.2)	15000 (1034)
3/4 "-16	1 NPT	MIHPA 7	2.44 (61.9)	0.81 (20.6)	0.13 (3.2)	15000 (1034)
1-1/8-12	1/8 NPT	MIHPA 7	2.00 (50.8)	0.87 (22.2)	0.19 (4.8)	15000 (1034)
1-1/8-12	1/4 NPT	MIHPA 8	2.13 (54.0)	1.06 (27.0)	0.19 (4.8)	15000 (1034)
1-1/8-12	3/8 NPT	MIHPA 8	2.13 (54.0)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
1-1/8-12	1/2 NPT	MIHPA 9	2.37 (60.3)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
1-1/8-12	3/4 NPT	MIHPA 9	2.37 (60.3)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
1-1/8-12	1 NPT	MIHPA 10	2.63 (66.7)	1.37 (34.9)	0.19 (4.8)	15000 (1034)

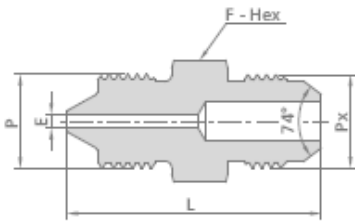

High Pressure HP Male to Male JIC Adapter 40000 psi



Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
9/16-8	1/4 JIC	MIHPM 1	1.56 (39.7)	0.63 (15.9)	0.08 (2.1)	20000 (1379)
9/16-8	3/8 JIC	MIHPM 2	1.56 (39.7)	0.63 (15.9)	0.08 (2.1)	15000 (1034)
9/16-8	1/2 JIC	MIHPM 3	1.69 (42.9)	0.81 (20.6)	0.08 (2.1)	20000 (1379)
9/16-8	5/8 JIC	MIHPM 4	1.81 (46.0)	0.94 (23.8)	0.08 (2.1)	20000 (1379)
9/16-8	3/4 JIC	MIHPM 5	2.00 (50.8)	1.13 (28.6)	0.08 (2.1)	20000 (1379)
9/16-8	1 JIC	MIHPM 6	2.13 (54.0)	1.37 (34.9)	0.08 (2.1)	15000 (1034)
3/4 "-16	1/4 JIC	MIHPM 7	1.81 (46.0)	0.81 (20.6)	0.13 (3.2)	20000 (1379)
3/4 "-16	3/8 JIC	MIHPM 8	1.81 (46.0)	0.94 (23.8)	0.13 (3.2)	15000 (1034)
3/4 "-16	1/2 JIC	MIHPM 9	1.94 (49.2)	1.13 (28.6)	0.13 (3.2)	20000 (1379)
3/4 "-16	5/8 JIC	MIHPM 10	2.06 (52.4)	1.37 (34.9)	0.13 (3.2)	20000 (1379)
3/4 "-16	3/4 JIC	MIHPM 11	2.25 (57.2)	0.81 (20.6)	0.13 (3.2)	20000 (1379)
3/4 "-16	1 JIC	MIHPM 12	2.37 (60.3)	0.81 (20.6)	0.13 (3.2)	15000 (1034)
1-1/8-12	1/4 JIC	MIHPM 13	2.13 (54.0)	1.19 (30.2)	0.17 (4.4)	20000 (1379)
1-1/8-12	3/8 JIC	MIHPM 14	2.13 (54.0)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
1-1/8-12	1/2 JIC	MIHPM 15	2.25 (57.2)	1.19 (30.2)	0.19 (4.8)	20000 (1379)
1-1/8-12	5/8 JIC	MIHPM 16	2.37 (60.3)	1.19 (30.2)	0.19 (4.8)	20000 (1379)
1-1/8-12	3/4 JIC	MIHPM 17	2.44 (61.9)	1.19 (30.2)	0.19 (4.8)	20000 (1379)
1-1/8-12	1 JIC	MIHPM 18	2.56 (65.0)	1.19 (30.2)	0.19 (4.8)	15000 (1034)

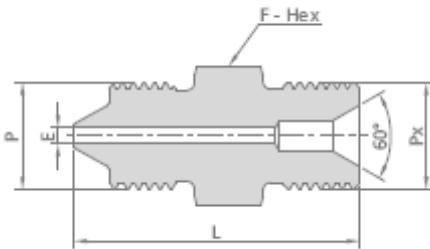


High Pressure HP Male to Type "M" Male Adapter 40000 psi

Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
9/16-18	9/16-18	MIHPM 1	1.46 (37.1)	0.63 (15.9)	0.08 (2.1)	60000 (4137)
9/16-18	3/4 "-16	MIHPM 2	1.63 (41.4)	0.75 (19.1)	0.08 (2.1)	30000 (2068)
9/16-18	7/8 "-14	MIHPM 3	1.83 (46.6)	1.00 (25.4)	0.08 (2.1)	50000 (3447)
9/16-18	1 "-12	MIHPM 4	1.72 (43.7)	1.00 (25.4)	0.08 (2.1)	30000 (2068)
9/16-18	1-5/16-12	MIHPM 5	1.84 (46.7)	1.37 (34.9)	0.08 (2.1)	20000 (1379)
3/4 "-16	9/16-18	MIHPM 6	1.77 (44.9)	0.81 (20.6)	0.09 (2.4)	60000 (4137)
3/4 "-16	3/4 "-16	MIHPM 7	1.90 (48.2)	0.81 (20.6)	0.13 (3.2)	30000 (2068)



High Pressure Male X Male Adapter 40000 psi

Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
3/4 "-16	7/8 "-14	MIHP 1	2.09 (53.0)	1.00 (25.4)	0.13 (3.2)	50000 (3447)
3/4 "-16	1 "-12	MIHP 2	1.97 (50.1)	1.00 (25.4)	0.13 (3.2)	30000 (2068)
3/4 "-16	1-5/16-12	MIHP 3	2.09 (53.1)	1.37 (34.9)	0.13 (3.2)	20000 (1379)
1-1/8-12	9/16-18	MIHP 4	2.07 (52.6)	1.19 (30.2)	0.09 (2.4)	60000 (4137)
1-1/8-12	3/4 "-16	MIHP 5	2.20 (55.9)	1.19 (30.2)	0.19 (4.8)	30000 (2068)
1-1/8-12	7/8 "-14	MIHP 6	2.33 (59.1)	1.19 (30.2)	0.15 (3.8)	50000 (3447)
1-1/8-12	1 "-12	MIHP 7	2.21 (56.2)	1.19 (30.2)	0.19 (4.8)	30000 (2068)
1-1/8-12	1-5/16-12	MIHP 8	2.26 (57.4)	1.37 (34.9)	0.19 (4.8)	20000 (1379)




Type "M" Male to Medium Pressure MP Coned and Threaded Nipples Adapter 15000 psi

Pconnection Type	Pconnection Type	Number Ordering	Dimension in (mm)			Working Pressure
			L	E	F	
9/16-18	1/4 "-28	MIMPA 1	1.80 (45.7)	0.63 (15.9)	0.09 (2.4)	20000 (1379)
9/16-18	3/8 "-24	MIMPA 2	2.05 (52.1)	0.63 (15.9)	0.09 (2.4)	20000 (1379)
9/16-18	9/16-18	MIMPA 3	2.28 (58.0)	0.69 (17.5)	0.09 (2.4)	20000 (1379)
9/16-18	3/4 "-16	MIMPA 4	2.58 (65.5)	0.87 (22.2)	0.09 (2.4)	20000 (1379)
9/16-18	1 "-14	MIMPA 5	3.22 (81.7)	1.13 (28.6)	0.09 (2.4)	20000 (1379)
3/4 "-16	1/4 "-28	MIMPA 6	1.97 (50.0)	0.75 (19.1)	0.11 (2.8)	20000 (1379)
3/4 "-16	3/8 "-24	MIMPA 7	2.22 (56.4)	0.75 (19.1)	0.20 (5.2)	20000 (1379)
3/4 "-16	9/16-18	MIMPA 8	2.43 (61.7)	0.75 (19.1)	0.29 (7.4)	20000 (1379)
3/4 "-16	3/4 "-16	MIMPA 9	2.71 (68.8)	0.87 (22.2)	0.29 (7.4)	20000 (1379)
3/4 "-16	1 "-14	MIMPA 10	3.35 (85.0)	1.13 (28.6)	0.29 (7.4)	20000 (1379)
7/8 "-14	1/4 "-28	MIMPA 11	2.17 (55.2)	1.00 (25.4)	0.11 (2.8)	20000 (1379)
7/8 "-14	3/8 "-24	MIMPA 12	2.43 (61.6)	1.00 (25.4)	0.15 (3.8)	20000 (1379)
7/8 "-14	9/16-18	MIMPA 13	2.63 (66.9)	1.00 (25.4)	0.15 (3.8)	20000 (1379)
7/8 "-14	3/4 "-16	MIMPA 14	2.88 (73.2)	1.00 (25.4)	0.15 (3.8)	20000 (1379)
7/8 "-14	1 "-14	MIMPA 15	3.47 (88.2)	1.13 (28.6)	0.15 (3.8)	20000 (1379)
1 "-12	1/4 "-28	MIMPA 16	2.06 (52.3)	1.00 (25.4)	0.11 (2.8)	20000 (1379)
1 "-12	3/8 "-24	MIMPA 17	2.31 (58.7)	1.00 (25.4)	0.20 (5.2)	20000 (1379)
1 "-12	9/16-18	MIMPA 18	2.52 (64.0)	1.00 (25.4)	0.31 (7.9)	20000 (1379)
1 "-12	3/4 "-16	MIMPA 19	2.77 (70.3)	1.00 (25.4)	0.39 (10.0)	20000 (1379)
1 "-12	1 "-14	MIMPA 20	3.36 (85.3)	1.13 (28.6)	0.39 (10.0)	20000 (1379)
1-5/16-12	1/4 "-28	MIMPA 21	2.18 (55.3)	1.37 (34.9)	0.11 (2.8)	20000 (1379)
1-5/16-12	3/8 "-24	MIMPA 22	2.43 (61.7)	1.37 (34.9)	0.20 (5.2)	20000 (1379)
1-5/16-12	9/16-18	MIMPA 23	2.64 (67.0)	1.37 (34.9)	0.31 (7.9)	20000 (1379)
1-5/16-12	3/4 "-16	MIMPA 24	2.89 (73.3)	1.37 (34.9)	0.44 (11.1)	20000 (1379)
1-5/16-12	1 "-14	MIMPA 25	3.42 (86.9)	1.37 (34.9)	0.56 (14.3)	20000 (1379)




Type "M" Male to High Pressure HP Coned and Threaded Nipples Adapter 40000 psi

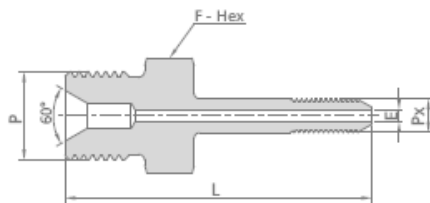


Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
9/16-8	1/4 "-28	MIHPM 1	2.15 (54.6)	0.63 (15.9)	0.08 (2.1)	60000 (4137)
3/4 "-16	3/8 "-24	MIHPM 2	2.53 (64.3)	0.63 (15.9)	0.09 (2.4)	60000 (4137)
3/4 "-16	9/16-18	MIHPM 3	3.12 (79.3)	0.63 (15.9)	0.09 (2.4)	60000 (4137)
3/4 "-16	1/4 "-28	MIHPM 4	2.31 (58.6)	0.75 (19.1)	0.08 (2.1)	30000 (2068)
7/8 "-14	3/8 "-24	MIHPM 5	2.70 (68.6)	0.75 (19.1)	0.13 (3.2)	30000 (2068)
1 "-12	9/16-18	MIHPM 6	3.29 (83.6)	0.75 (19.1)	0.19 (4.8)	30000 (2068)
1 "-12	1/4 "-28	MIHPM 7	2.51 (63.8)	1.00 (25.4)	0.08 (2.1)	50000 (3447)
1 "-12	3/8 "-24	MIHPM 8	2.91 (73.8)	1.00 (25.4)	0.13 (3.2)	50000 (3447)
1-5/16-12	9/16-18	MIHPM 9	3.50 (88.8)	1.00 (25.4)	0.15 (3.8)	50000 (3447)
1-5/16-12	1/4 "-28	MIHPM 10	2.40 (60.9)	1.00 (25.4)	0.08 (2.1)	30000 (2068)
9/16-8	3/8 "-24	MIHPM 11	2.79 (70.9)	1.00 (25.4)	0.13 (3.2)	30000 (2068)
7/8 "-14	9/16-18	MIHPM 12	3.38 (85.9)	1.00 (25.4)	0.19 (4.8)	30000 (2068)
7/8 "-14	1/4 "-28	MIHPM 13	2.52 (63.9)	1.37 (34.9)	0.08 (2.1)	20000 (1379)
1-5/16-12	3/8 "-24	MIHPM 14	2.91 (73.9)	1.37 (34.9)	0.13 (3.2)	20000 (1379)
1-5/16-12	9/16-18	MIHPM 15	3.50 (88.9)	1.37 (34.9)	0.19 (4.8)	20000 (1379)

Medium Pressure MP Female to Low Pressure LP Female Adapter 15000 psi

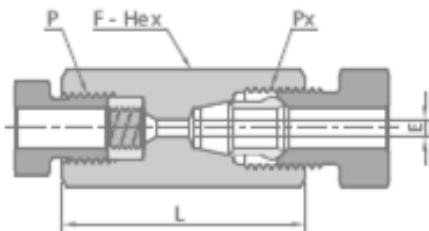

Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
7/16-20	3/8 "-24	MI MPLP 1	1.25 (31.8)	0.63 (15.9)	0.09 (2.4)	15000 (1034)
7/16-20	1/2 "-20	MI MPLP 2	1.50 (38.1)	0.63 (15.9)	0.11 (2.8)	15000 (1034)
7/16-20	5/8 "-18	MI MPLP 2	1.63 (41.3)	0.75 (19.1)	0.11 (2.8)	15000 (1034)
7/16-20	13/16-16	MI MPLP 3	1.75 (44.5)	1.00 (25.4)	0.11 (2.8)	15000 (1034)
9/16-18	3/8 "-24	MI MPLP 3	1.44 (36.5)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
9/16-18	1/2 "-20	MI MPLP 4	1.69 (42.9)	1.00 (25.4)	0.19 (4.8)	15000 (1034)
9/16-18	5/8 "-18	MI MPLP 4	1.75 (44.5)	0.75 (19.1)	0.20 (5.2)	15000 (1034)
9/16-18	13/16-16	MI MPLP 5	1.87 (47.6)	0.75 (19.1)	0.20 (5.2)	15000 (1034)

Medium Pressure MP Female to Female NPT Thread Coupling 15000 psi




Pconnection Type	PX Connection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	F	E	
7/16-20	1/8 NPT	MI MPF 1	1.37 (34.9)	0.63 (15.9)	0.11 (2.8)	15000 (1034)
7/16-20	1/4 NPT	MI MPF 2	1.63 (41.3)	0.94 (23.8)	0.11 (2.8)	15000 (1034)
7/16-20	3/8 NPT	MI MPF 3	1.63 (41.3)	1.13 (28.6)	0.11 (2.8)	15000 (1034)
7/16-20	1/2 NPT	MI MPF 4	2.00 (50.8)	1.37 (34.9)	0.11 (2.8)	15000 (1034)
9/16-18	1/8 NPT	MI MPF 5	1.50 (38.1)	0.75 (19.1)	0.31 (7.9)	15000 (1034)
9/16-18	1/4 NPT	MI MPF 6	1.75 (44.5)	0.94 (23.8)	0.31 (7.9)	15000 (1034)
9/16-18	3/8 NPT	MI MPF 7	1.81 (46.0)	1.13 (28.6)	0.31 (7.9)	15000 (1034)
9/16-18	1/2 NPT	MI MPF 8	2.13 (54.0)	1.37 (34.9)	0.32 (8.1)	15000 (1034)
9/16-18	3/4 NPT	MI MPF 9	2.25 (57.2)	1.50 (38.1)	0.20 (5.1)	10000 (690)
13/16-16	1/8 NPT	MI MPF 10	1.63 (41.3)	1.00 (25.4)	0.20 (5.1)	15000 (1034)
13/16-16	1/4 NPT	MI MPF 11	2.00 (50.8)	1.00 (25.4)	0.20 (5.1)	15000 (1034)
13/16-16	3/8 NPT	MI MPF 12	2.00 (50.8)	1.13 (28.6)	0.20 (5.1)	15000 (1034)
13/16-16	1/2 NPT	MI MPF 13	2.25 (57.2)	1.37 (34.9)	0.20 (5.1)	15000 (1034)
13/16-16	3/4 NPT	MI MPF 14	2.25 (57.2)	1.50 (38.1)	0.31 (7.9)	10000 (690)
13/16-16	1 NPT	MI MPF 15	2.63 (66.7)	1.75 (44.5)	0.31 (7.9)	10000 (690)
1-3/8-12	1/8 NPT	MI MPF 16	1.75 (44.5)	1.37 (34.9)	0.31 (7.9)	15000 (1034)
1-3/8-12	1/4 NPT	MI MPF 17	2.00 (50.8)	1.37 (34.9)	0.41 (10.4)	15000 (1034)
1-3/8-12	3/8 NPT	MI MPF 18	2.37 (60.3)	1.37 (34.9)	0.44 (11.1)	15000 (1034)
1-3/8-12	1/2 NPT	MI MPF 19	2.63 (66.7)	1.37 (34.9)	0.44 (11.1)	15000 (1034)
1-3/8-12	3/4 NPT	MI MPF 20	2.63 (66.7)	1.50 (38.1)	0.44 (11.1)	10000 (690)
1-3/8-12	1 NPT	MI MPF 21	2.63 (66.7)	1.75 (44.5)	0.44 (11.1)	10000 (690)
1-3/8-12	1/4 NPT	MI MPF 22	2.37 (60.3)	1.75 (44.5)	0.41 (10.4)	15000 (1034)
1-3/8-12	3/8 NPT	MI MPF 23	2.50 (63.5)	1.75 (44.5)	0.55 (13.9)	15000 (1034)
1-3/8-12	1/2 NPT	MI MPF 24	3.00 (76.2)	1.75 (44.5)	0.56 (14.3)	15000 (1034)
1-3/8-12	3/4 NPT	MI MPF 25	3.00 (76.2)	1.75 (44.5)	0.56 (14.3)	10000 (690)
1-3/8-12	1 NPT	MI MPF 26	3.00 (76.2)	1.75 (44.5)	0.56 (14.3)	10000 (690)

Dimensions are for reference only and subject to change without notice.

Warning for Your Safety

The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.

High Pressure HP Female to Low Pressure LP Female Adapter 40000 psi

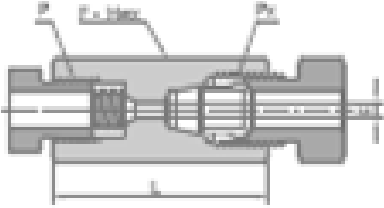

Pconnection Type	PX Connection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	F	E	
9/16-18	3/8 "-24	MIHPLPF 1	1.19 (30.2)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
9/16-18	1/2 "-20	MIHPLPF 2	1.50 (38.1)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
9/16-18	5/8 "-18	MIHPLPF 2	1.63 (41.3)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
9/16-18	13/16-16	MIHPLPF 3	1.75 (44.5)	1.00 (25.4)	0.09 (2.4)	15000 (1034)
3/4 "-16	3/8 "-24	MIHPLPF 3	1.50 (38.1)	1.00 (25.4)	0.09 (2.4)	15000 (1034)
3/4 "-16	1/2 "-20	MIHPLPF 4	1.75 (44.5)	1.00 (25.4)	0.13 (3.2)	15000 (1034)
3/4 "-16	5/8 "-18	MIHPLPF 4	1.81 (46.0)	1.00 (25.4)	0.13 (3.2)	15000 (1034)
3/4 "-16	13/16-16	MIHPLPF 5	2.00 (50.8)	1.00 (25.4)	0.13 (3.2)	15000 (1034)
1-1/8-12	3/8 "-24	MIHPLPF 5	1.69 (42.9)	1.37 (34.9)	0.09 (2.4)	15000 (1034)
1-1/8-12	1/2 "-20	MIHPLPF 6	1.87 (47.6)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
1-1/8-12	5/8 "-18	MIHPLPF 6	2.00 (50.8)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
1-1/8-12	13/16-16	MIHPLPF 7	2.13 (54.0)	1.37 (34.9)	0.19 (4.8)	15000 (1034)


Dimensions are for reference only and subject to change without notice.

Warning for Your Safety

The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.



High Pressure HP Female to Female NPT Thread Coupling 40000 psi

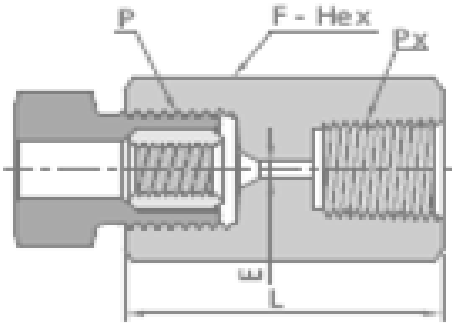

PConnection Type	Pconnection Type	Ordering Number	Dimension in(mm)			Working Pressure
			L	E	F	
9/16-18	1/8 NPT	MI HPC 1	1.37 (34.9)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
9/16-18	1/4 NPT	MI HPC 2	1.63 (41.3)	1.00 (25.4)	0.09 (2.4)	15000 (1034)
9/16-18	3/8 NPT	MI HPC 2	1.63 (41.3)	1.00 (25.4)	0.09 (2.4)	15000 (1034)
9/16-18	1 NPT	MI HPC 3	2.00 (50.8)	1.13 (28.6)	0.09 (2.4)	15000 (1034)
9/16-18	1/8 NPT	MI HPC 3	2.37 (60.3)	1.75 (44.5)	0.09 (2.4)	10000 (690)
3/4 "16	1/4 NPT	MI HPC 4	1.63 (41.3)	1.37 (34.9)	0.13 (3.2)	10000 (690)
3/4 "16	3/8 NPT	MI HPC 4	1.87 (47.6)	1.37 (34.9)	0.13 (3.2)	15000 (1034)
3/4 "16	1/8 NPT	MI HPC 5	2.13 (54.0)	1.75 (44.5)	0.13 (3.2)	15000 (1034)
3/4 "16	1/4 NPT	MI HPC 5	1.81 (46.0)	0.94 (23.8)	0.13 (3.2)	15000 (1034)
1-1/8-12	3/8 NPT	MI HPC 6	2.00 (50.8)	1.13 (28.6)	0.19 (4.8)	15000 (1034)
1-1/8-12	3/4 NPT	MI HPC 6	2.00 (50.8)	1.37 (34.9)	0.19 (4.8)	10000 (690)
1-1/8-12	1 NPT	MI HPC 7	2.37 (60.3)	1.37 (34.9)	0.19 (4.8)	10000 (690)
1-1/8-12	3/4 NPT	MI HPC 7	2.37 (60.3)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
1-1/8-12	1 NPT	MI HPC 8	2.50 (63.5)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
1-1/8-12	3/4 NPT	MI HPC 8	1.87 (47.6)	1.50 (38.1)	0.19 (4.8)	15000 (1034)
9/16-18	1/2 NPT	MI HPC 9	2.00 (50.8)	1.50 (38.1)	0.19 (4.8)	15000 (1034)
3/4 "16	1/2 NPT	MI HPC 9	2.25 (57.2)	1.75 (44.5)	0.13 (3.2)	10000 (690)
3/4 "16	1/2 NPT	MI HPC 10	2.00 (50.8)	1.50 (38.1)	0.13 (3.2)	10000 (690)


Dimensions are for reference only and subject to change without notice.

Warning for Your Safety

The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.




Low Pressure LP Female to Low Pressure LP Male Adapter 10000 psi

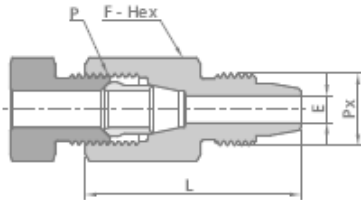

Pconnection Type	Pconnection Type	Ordering Number	Dimension in (mm)			Working Pressure
			L	E	F	
MP2/CP2/FH2: 3/8"-24	3/8"-24	MILPF 1	1.06 (27.0)	0.63 (15.9)	0.63 (15.9)	15000 (1034)
MP4/CP4/FH4: 1/2"-20	1/2"-20	MILPF 2	1.13 (28.6)	0.75 (19.1)	0.75 (19.1)	15000 (1034)
MP6/CP6/FH6: 5/8"-18	5/8"-18	MILPF 3	1.13 (28.6)	0.94 (23.8)	0.94 (23.8)	15000 (1034)
MP6/CP6/FH6: 5/8"-18	13/16-16	MILPF 4	1.31 (33.3)	0.50 (12.7)	0.50 (12.7)	15000 (1034)


Low Pressure LP Female to Medium Pressure MP Male Adapter 15000 psi

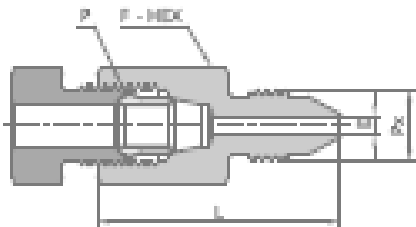

PConnection Type	PConnection Type	Ordering Number	Dimensions, in. (mm)			Work Pressure
			L	E	F	
5/8"-18	3/8"-24	MIMPFM 1	1.56 (39.7)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
5/8"-18	1/2"-20	MIMPFM 2	1.69 (42.9)	0.94 (23.8)	0.19 (4.8)	15000 (1034)
5/8"-18	5/8"-18	MIMPFM 3	1.69 (42.9)	0.75 (19.1)	0.25 (6.4)	15000 (1034)
5/8"-18	13/16-16	MIMPFM 4	1.63 (41.3)	0.75 (19.1)	0.25 (6.4)	15000 (1034)
13/16-16	3/8"-24	MIMPFM 5	1.63 (41.3)	1.00 (25.4)	0.09 (2.4)	15000 (1034)
13/16-16	1/2"-20	MIMPFM 6	1.75 (44.5)	1.00 (25.4)	0.19 (4.8)	15000 (1034)
13/16-16	5/8"-18	MIMPFM 7	1.81 (46.0)	1.00 (25.4)	0.25 (6.4)	15000 (1034)
13/16-16	13/16-16	MIMPFM 8	1.81 (46.0)	1.00 (25.4)	0.37 (9.5)	15000 (1034)
1/2"-20	3/8"-24	MIMPFM 9	1.44 (36.5)	0.63 (15.9)	0.09 (2.4)	15000 (1034)
1/2"-20	1/2"-20	MIMPFM 10	1.50 (38.1)	0.75 (19.1)	0.19 (4.8)	15000 (1034)
1/2"-20	5/8"-18	MIMPFM 11	1.50 (38.1)	0.94 (23.8)	0.19 (4.8)	15000 (1034)
1/2"-20	13/16-16	MIMPFM 12	1.50 (38.1)	0.63 (15.9)	0.19 (4.8)	15000 (1034)



Low Pressure LP Female to Medium Pressure MP Coned and Threaded Nipples Adapter 15000 psi

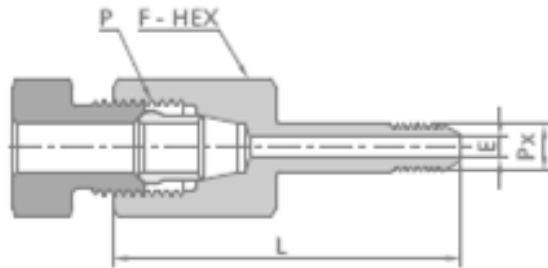

PConnection Type	PConnection Type	Ordering Number	Dimensions, in. (mm)			Work Pressure
			L	E	F	
3/8 "-24	1/4 "-28	MI LPF 1	1.50 (38.1)	0.50 (12.7)	0.09 (2.4)	15000 (1034)
1/2 "-20	3/8 "-24	MILPF 2	1.75 (44.5)	0.69 (17.5)	0.09 (2.4)	15000 (1034)
5/8 "-18	9/16-18	MI LPF 2	1.94 (49.2)	0.87 (22.2)	0.09 (2.4)	15000 (1034)
13/16-16	3/4 "-16	MI LPF 3	2.13 (54.0)	0.69 (17.5)	0.09 (2.4)	15000 (1034)
3/8 "-24	1/4 "-28	MI LPF 3	1.81 (46.0)	0.87 (22.2)	0.11 (2.8)	15000 (1034)
1/2 "-20	3/8 "-24	MI LPF 4	2.00 (50.8)	0.63 (15.9)	0.19 (4.8)	15000 (1034)
5/8 "-18	9/16-18	MI LPF 4	2.19 (55.6)	0.63 (15.9)	0.19 (4.8)	15000 (1034)
13/16-16	3/4 "-16	MI LPF 5	2.37 (60.3)	0.75 (19.1)	0.19 (4.8)	15000 (1034)
1/2 "-20	1 "-14	MI LPF 5	2.00 (50.8)	0.87 (22.2)	0.11 (2.8)	15000 (1034)
1/2 "-20	3/8 "-24	MI LPF 6	2.31 (58.7)	0.75 (19.1)	0.20 (5.2)	15000 (1034)
5/8 "-18	9/16-18	MI LPF 6	2.37 (60.3)	0.75 (19.1)	0.25 (6.4)	15000 (1034)
5/8 "-18	3/4 "-16	MI LPF 7	2.50 (63.5)	1.13 (28.6)	0.25 (6.4)	15000 (1034)
5/8 "-18	1 "-14	MI LPF 1	3.00 (76.2)	1.00 (25.4)	0.25 (6.4)	15000 (1034)
5/8 "-18	1/4 "-28	MI LPF 2	2.06 (52.4)	1.00 (25.4)	0.11 (2.8)	15000 (1034)
13/16-16	3/8 "-24	MI LPF 2	2.31 (58.7)	1.00 (25.4)	0.20 (5.2)	15000 (1034)
13/16-16	9/16-18	MI LPF 3	2.56 (65.1)	1.00 (25.4)	0.31 (7.9)	15000 (1034)
13/16-16	3/4 "-16	MI LPF 3	2.63 (66.7)	1.13 (28.6)	0.37 (9.5)	15000 (1034)
13/16-16	1 "-14	MI LPF 4	3.19 (81.0)	0.50 (12.7)	0.37 (9.5)	15000 (1034)


Dimensions are for reference only and subject to change without notice.

Warning for Your Safety

The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.



Low Pressure LP Female to High Pressure HP Male Adapter 40000 psi

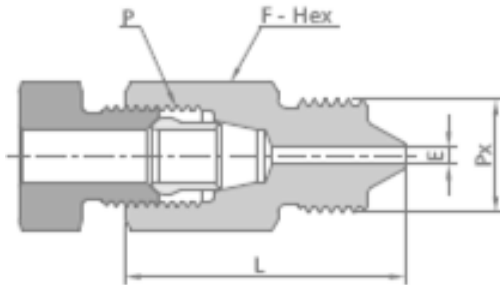


PConnection Type	PConnection Type	Ordering Number	Dimensions, in. (mm)			Work Pressure
			L	E	F	
3/8 "-24	9/16-18	MILPHP 1	1.06 (27.0)	0.63 (15.9)	0.08 (2.1)	15000 (1034)
1/2 "-20	3/4 "-16	MILPHP 2	1.31 (33.3)	0.81 (20.6)	0.09 (2.4)	15000 (1034)
5/8 "-18	1-1/8-12	MILPHP 3	1.63 (41.3)	1.19 (30.2)	0.09 (2.4)	15000 (1034)
13/16-16	9/16-18	MILPHP 4	1.37 (34.9)	0.63 (15.9)	0.08 (2.1)	15000 (1034)
3/8 "-24	3/4 "-16	MILPHP 5	1.56 (39.7)	0.81 (20.6)	0.13 (3.2)	15000 (1034)
3/8 "-24	1-1/8-12	MILPHP 6	1.63 (41.3)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
1/2 "-20	9/16-18	MILPHP 7	1.56 (39.7)	0.75 (19.1)	0.08 (2.1)	15000 (1034)
1/2 "-20	3/4 "-16	MILPHP 8	1.75 (44.5)	0.81 (20.6)	0.13 (3.2)	15000 (1034)
5/8 "-18	1-1/8-12	MILPHP 9	1.63 (41.3)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
5/8 "-18	9/16-18	MILPHP 10	1.69 (42.9)	1.00 (25.4)	0.08 (2.1)	15000 (1034)
13/16-16	3/4 "-16	MILPHP 11	1.87 (47.6)	1.00 (25.4)	0.13 (3.2)	15000 (1034)
13/16-16	1-1/8-12	MILPHP 12	1.87 (47.6)	1.19 (30.2)	0.19 (4.8)	15000 (1034)

Dimensions are for reference only and subject to change without notice.

Warning for Your Safety

The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.

Low Pressure LP Female to High Pressure HP Coned and Threaded Nipples Adapter 40000 psi

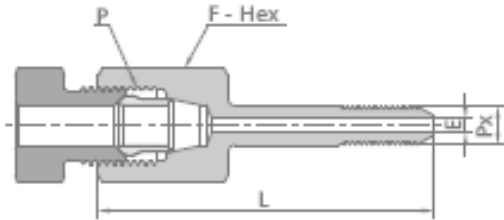

PConnection Type	PConnection Type	Ordering Number	Dimensions, in. (mm)			Work Pressure
			L	E	F	
3/8 "-24	1/4 "-28	MIHPN 1	3.00 (76.2)	0.50 (12.7)	0.08 (2.1)	15000 (1034)
1/2 "-20	3/8 "-24	MIHPN 2	2.69 (68.3)	0.50 (12.7)	0.09 (2.4)	15000 (1034)
5/8 "-18	1/4 "-28	MIHPN 3	2.44 (61.9)	0.63 (15.9)	0.08 (2.1)	15000 (1034)
13/16-16	3/8 "-24	MIHPN 4	2.75 (69.9)	0.63 (15.9)	0.13 (3.2)	15000 (1034)
3/8 "-24	9/16-18	MIHPN 5	3.38 (85.8)	0.63 (15.9)	0.19 (4.8)	15000 (1034)
1/2 "-20	1/4 "-28	MIHPN 6	1.87 (47.6)	0.75 (19.1)	0.08 (2.1)	15000 (1034)
1/2 "-20	3/8 "-24	MIHPN 7	2.25 (57.2)	0.75 (19.1)	0.13 (3.2)	15000 (1034)
5/8 "-18	9/16-18	MIHPN 8	2.13 (54.0)	0.75 (19.1)	0.19 (4.8)	15000 (1034)
5/8 "-18	1/4 "-28	MIHPN 9	2.50 (63.5)	1.00 (25.4)	0.08 (2.1)	15000 (1034)
13/16-16	3/8 "-24	MIHPN 10	2.37 (60.3)	1.00 (25.4)	0.13 (3.2)	15000 (1034)
13/16-16	9/16-18	MIHPN 11	3.19 (81.0)	1.00 (25.4)	0.19 (4.8)	15000 (1034)


Dimensions are for reference only and subject to change without notice.

Warning for Your Safety

The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.




Low Pressure LP Female to Type "M" Male Coupling 10000 psi

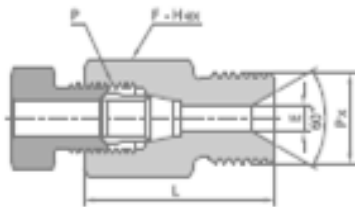


PConnection Type	Px Connection type	Ordering Number	Dimensions, in. (mm)			Work Pressure
			L	E	F	
1/2"-20	9/16-18	MILP FX M 1	1.13 (28.6)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
9/16-18	3/4"-16	MILP FX M 2	1.37 (34.9)	0.63 (15.9)	0.09 (2.4)	15000 (1034)
5/8"-18	9/16-18	MILP FX M 2	1.44 (36.5)	0.75 (19.1)	0.19 (4.8)	15000 (1034)
3/8"-24	3/4"-16	MILP FX M 3	1.63 (41.3)	1.00 (25.4)	0.15 (3.8)	15000 (1034)
1/2"-20	7/8"-14	MILP FX M 3	1.50 (38.1)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
1/2"-20	9/16-18	MILP FX M 4	1.63 (41.3)	0.75 (19.1)	0.25 (6.4)	15000 (1034)
5/8"-18	3/4"-16	MILP FX M 4	1.75 (44.5)	1.00 (25.4)	0.15 (3.8)	15000 (1034)
5/8"-18	7/8"-14	MILP FX M 5	1.63 (41.3)	1.00 (25.4)	0.25 (6.4)	15000 (1034)
5/8"-18	1"-12	MILP FX M 5	1.63 (41.3)	1.00 (25.4)	0.09 (2.4)	15000 (1034)
13/16-16	9/16-18	MILP FX M 6	1.63 (41.3)	1.00 (25.4)	0.29 (7.4)	15000 (1034)
13/16-16	3/4"-16	MILP FX M 6	1.81 (46.1)	1.00 (25.4)	0.15 (3.8)	15000 (1034)
13/16-16	7/8"-14	MILP FX M 7	1.75 (44.5)	1.00 (25.4)	0.37 (9.5)	15000 (1034)
13/16-16	1"-12	MILP FX M 7	1.75 (44.5)	1.37 (34.9)	0.37 (9.5)	15000 (1034)
13/16-16	1-5/16-12	MILP FX M 8	1.06 (27.0)	0.63 (15.9)	0.09 (2.4)	15000 (1034)

Medium Pressure MP Female to Low Pressure Male LP Coupling 15000 psi




PConnection Type	Px Connection type	Ordering Number	Dimensions, in. (mm)			Work Pressure
			L	E	F	
7/16-20	3/8"-24	MIMPF 1	1.19 (30.2)	0.63 (15.9)	0.09 (2.4)	15000 (1034)
7/16-20	1/2"-20	MIMPF 2	1.31 (33.3)	0.63 (15.9)	0.11 (2.8)	15000 (1034)
7/16-20	5/8"-18	MIMPF 3	1.37 (34.9)	0.75 (19.1)	0.11 (2.8)	15000 (1034)
7/16-20	13/16-16	MIMPF 4	1.31 (33.3)	0.94 (23.8)	0.11 (2.8)	15000 (1034)
9/16-18	3/8"-24	MIMPF 5	1.50 (38.1)	0.75 (19.1)	0.09 (2.4)	15000 (1034)
9/16-18	1/2"-20	MIMPF 6	1.50 (38.1)	0.75 (19.1)	0.19 (4.8)	15000 (1034)
9/16-18	5/8"-18	MIMPF 7	1.56 (39.7)	0.75 (19.1)	0.20 (5.2)	15000 (1034)
9/16-18	13/16-16	MIMPF 8	1.56 (39.7)	0.94 (23.8)	0.20 (5.2)	15000 (1034)
13/16-16	3/8"-24	MIMPF 9	1.75 (44.5)	1.00 (25.4)	0.09 (2.4)	15000 (1034)
13/16-16	1/2"-20	MIMPF 10	1.87 (47.6)	1.00 (25.4)	0.19 (4.8)	15000 (1034)
13/16-16	5/8"-18	MIMPF 11	1.94 (49.2)	1.00 (25.4)	0.25 (6.4)	15000 (1034)
13/16-16	13/16-16	MIMPF 12	1.87 (47.6)	1.00 (25.4)	0.31 (7.9)	15000 (1034)
3/4"-14	3/8"-24	MIMPF 13	2.06 (52.4)	1.37 (34.9)	0.09 (2.4)	15000 (1034)
3/4"-14	1/2"-20	MIMPF 14	2.19 (55.6)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
3/4"-14	5/8"-18	MIMPF 15	2.19 (55.6)	1.37 (34.9)	0.25 (6.4)	15000 (1034)
3/4"-14	13/16-16	MIMPF 16	2.25 (57.2)	1.37 (34.9)	0.37 (9.5)	15000 (1034)
1-3/8-12	3/8"-24	MIMPF 17	2.63 (66.7)	1.75 (44.5)	0.09 (2.4)	15000 (1034)
1-3/8-12	1/2"-20	MIMPF 18	2.75 (69.9)	1.75 (44.5)	0.19 (4.8)	15000 (1034)
1-3/8-12	5/8"-18	MIMPF 19	2.81 (71.4)	1.75 (44.5)	0.25 (6.4)	15000 (1034)
1-3/8-12	13/16-16	MIMPF 20	2.81 (71.4)	1.75 (44.5)	0.37 (9.5)	15000 (1034)

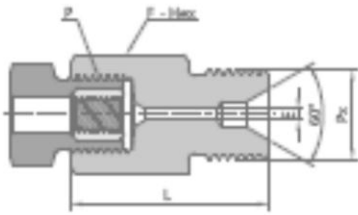

High Pressure HP Female to Type "M" Male Coupling 40000 psi


PConnection Type	PX Connection type	Ordering Number	Dimensions, in. (mm)			Working Pressure psig (bar)
			L	F	E	
9/16-18	9/16-18	MIHPM 1	1.38 (35.0)	0.75 (19.1)	0.09 (2.4)	30000 (2068)
9/16-18	3/4 "-16	MIHPM 2	1.56 (39.7)	1.00 (25.4)	0.09 (2.4)	50000 (3447)
9/16-18	7/8 "14	MIHPM 3	1.37 (34.9)	1.00 (25.4)	0.09 (2.4)	30000 (2068)
9/16-18	1 "-12	MIHPM 4	1.50 (38.1)	1.00 (25.4)	0.09 (2.4)	60000 (4137)
9/16-18	9/16-18	MIHPM 5	1.63 (41.3)	1.00 (25.4)	0.13 (3.2)	30000 (2068)
3/4 "-16	3/4 "-16	MIHPM 6	1.81 (46.0)	1.00 (25.4)	0.13 (3.2)	50000 (3447)
3/4 "-16	7/8 "14	MIHPM 7	1.64 (41.6)	1.00 (25.4)	0.13 (3.2)	30000 (2068)
3/4 "-16	1 "-12	MIHPM 8	1.56 (39.7)	1.37 (34.9)	0.13 (3.2)	20000 (1379)
3/4 "-16	1-5/16-12	MIHPM 9	2.00 (50.8)	1.37 (34.9)	0.15 (3.8)	50000 (3447)
1-1/8-12	9/16-18	MIHPM 10	1.81 (46.0)	1.37 (34.9)	0.19 (4.8)	30000 (2068)
1-1/8-12	3/4 "-16	MIHPM 11	1.81 (46.0)	1.37 (34.9)	0.19 (4.8)	20000 (1379)
1-1/8-12	1-5/16-12	MIHPM 12	1.25 (31.8)	0.75 (19.1)	0.19 (4.8)	60000 (4137)



Female NPT Threads to Low Pressure LP Male Adapter 10000 psi

PConnection Type	PXConnection type	Ordering Number	Dimensions, in. (mm)			Working Pressure psig (bar)
			L	F	E	
1/8 NPT	3/8 "-24	MILPF 1	1.13 (28.6)	0.63 (15.9)	0.09 (2.4)	15000 (1034)
1/8 NPT	1/2 "-20	MILPF 2	1.25 (31.7)	0.63 (15.9)	0.19 (4.8)	15000 (1034)
1/8 NPT	5/8 "-18	MILPF 3	1.31 (33.3)	0.75 (19.1)	0.25 (6.4)	15000 (1034)
1/8 NPT	13/16-16	MILPF 4	1.31 (33.3)	0.94 (23.8)	0.37 (9.5)	15000 (1034)
1/4 NPT	3/8 "-24	MILPF 5	1.31 (33.3)	0.94 (23.8)	0.09 (2.4)	15000 (1034)
1/4 NPT	1/2 "-20	MILPF 6	1.50 (38.1)	0.94 (23.8)	0.19 (4.8)	15000 (1034)
1/4 NPT	5/8 "-18	MILPF 7	1.56 (39.7)	0.94 (23.8)	0.25 (6.4)	15000 (1034)
1/4 NPT	13/16-16	MILPF 8	1.56 (39.7)	0.94 (23.8)	0.37 (9.5)	15000 (1034)
3/8 NPT	3/8 "-24	MILPF 9	1.44 (36.5)	1.13 (28.6)	0.09 (2.4)	15000 (1034)
3/8 NPT	1/2 "-20	MILPF 10	1.56 (39.7)	1.13 (28.6)	0.19 (4.8)	15000 (1034)
3/8 NPT	5/8 "-18	MILPF 11	1.63 (41.3)	1.13 (28.6)	0.25 (6.4)	15000 (1034)
3/8 NPT	13/16-16	MILPF 12	1.69 (42.9)	1.13 (28.6)	0.37 (9.5)	15000 (1034)
3/4 NPT	3/8 "-24	MILPF 13	1.63 (41.3)	1.37 (34.9)	0.09 (2.4)	15000 (1034)
3/4 NPT	1/2 "-20	MILPF 14	1.75 (44.5)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
3/4 NPT	5/8 "-18	MILPF 15	1.87 (47.6)	1.37 (34.9)	0.25 (6.4)	15000 (1034)
3/4 NPT	13/16-16	MILPF 16	1.87 (47.6)	1.37 (34.9)	0.37 (9.5)	15000 (1034)
1 NPT	3/8 "-24	MILPF 17	1.69 (42.9)	1.50 (38.1)	0.09 (2.4)	10000 (690)
1 NPT	1/2 "-20	MILPF 18	1.87 (47.6)	1.50 (38.1)	0.19 (4.8)	10000 (690)
1 NPT	5/8 "-18	MILPF 19	1.94 (49.2)	1.50 (38.1)	0.25 (6.4)	10000 (690)
1 NPT	13/16-16	MILPF 20	1.94 (49.2)	1.50 (38.1)	0.37 (9.5)	10000 (690)
1/2 NPT	3/8 "-24	MILPF 21	2.00 (50.8)	1.75 (44.5)	0.09 (2.4)	10000 (690)
1/2 NPT	1/2 "-20	MILPF 22	2.13 (54.0)	1.75 (44.5)	0.19 (4.8)	10000 (690)
1/2 NPT	5/8 "-18	MILPF 23	2.19 (55.6)	1.75 (44.5)	0.25 (6.4)	10000 (690)
1/2 NPT	13/16-16	MILPF 24	2.19 (55.6)	1.75 (44.5)	0.37 (9.5)	10000 (690)

Female NPT Threads to Medium Pressure MP Male Adapter 15000 psi

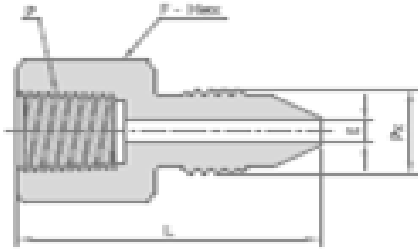


PConnection TYPE	PX Connection TYPE	Ordering Number	Dimension in(mm)			Working Pressure
			L	F	E	
1/8 NPT	7/16-20	MIMPF X M 1	1.25 (31.8)	0.63 (15.9)	0.11 (2.8)	15000 (1034)
3/8 NPT	9/16-18	MIMPF X M 1	1.37 (34.9)	0.63 (15.9)	0.20 (5.2)	15000 (1034)
3/4 NPT	13/16-16	MIMPF X M 1	1.50 (38.1)	0.94 (23.8)	0.31 (7.9)	15000 (1034)
1 NPT	3/4"-14	MIMPF X M 1	1.75 (44.5)	1.19 (30.2)	0.31 (7.9)	15000 (1034)
1/8 NPT	1-3/8-12	MIMPF X M 1	2.37 (60.3)	1.50 (38.1)	0.31 (7.9)	15000 (1034)
1/8 NPT	7/16-20	MIMPF X M 1	1.44 (36.5)	0.94 (23.8)	0.11 (2.8)	15000 (1034)
1/8 NPT	9/16-18	MIMPF X M 1	1.63 (41.3)	0.94 (23.8)	0.20 (5.2)	15000 (1034)
1/8 NPT	13/16-16	MIMPF X M 1	1.75 (44.5)	0.94 (23.8)	0.31 (7.9)	15000 (1034)
1/4 NPT	3/4"-14	MIMPF X M 1	1.87 (47.6)	1.19 (30.2)	0.41 (10.4)	15000 (1034)
1/4 NPT	1-3/8-12	MIMPF X M 1	2.37 (60.3)	1.50 (38.1)	0.41 (10.4)	15000 (1034)
1/4 NPT	7/16-20	MIMPF X M 1	1.50 (38.1)	1.13 (28.6)	0.11 (2.8)	15000 (1034)
1/4 NPT	9/16-18	MIMPF X M 1	1.69 (42.9)	1.13 (28.6)	0.20 (5.2)	15000 (1034)
3/8 NPT	13/16-16	MIMPF X M 1	1.81 (46.0)	1.13 (28.6)	0.31 (7.9)	15000 (1034)
3/8 NPT	3/4"-14	MIMPF X M 1	2.00 (58.0)	1.19 (30.2)	0.44 (11.1)	15000 (1034)
3/8 NPT	1-3/8-12	MIMPF X M 1	2.37 (60.3)	1.50 (38.1)	0.56 (14.3)	15000 (1034)
3/8 NPT	7/16-20	MIMPF X M 1	1.75 (44.5)	1.37 (34.9)	0.11 (2.8)	15000 (1034)
3/4 NPT	9/16-18	MIMPF X M 1	1.87 (47.6)	1.37 (34.9)	0.20 (5.2)	15000 (1034)
3/4 NPT	13/16-16	MIMPF X M 1	2.06 (52.4)	1.37 (34.9)	0.31 (7.9)	15000 (1034)
3/4 NPT	3/4"-14	MIMPF X M 1	2.19 (55.6)	1.37 (34.9)	0.44 (11.1)	15000 (1034)
3/4 NPT	1-3/8-12	MIMPF X M 1	2.56 (65.1)	1.50 (38.1)	0.56 (14.3)	15000 (1034)
1 NPT	7/16-20	MIMPF X M 1	1.81 (46.0)	1.50 (38.1)	0.11 (2.8)	10000 (690)
1 NPT	9/16-18	MIMPF X M 1	1.94 (49.2)	1.50 (38.1)	0.20 (5.2)	10000 (690)
1 NPT	13/16-16	MIMPF X M 1	2.13 (54.0)	1.50 (38.1)	0.31 (7.9)	10000 (690)
1 NPT	3/4"-14	MIMPF X M 1	2.31 (58.7)	1.50 (38.1)	0.44 (11.1)	10000 (690)
1/4 NPT	1-3/8-12	MIMPF X M 1	2.75 (69.9)	1.75 (44.5)	0.56 (14.3)	10000 (690)
1/2 NPT	7/16-20	MIMPF X M 1	2.06 (52.4)	1.75 (44.5)	0.11 (2.8)	10000 (690)
1/2 NPT	9/16-18	MIMPF X M 1	2.19 (55.6)	1.75 (44.5)	0.20 (5.2)	10000 (690)
1/2 NPT	13/16-16	MIMPF X M 1	2.44 (61.9)	1.75 (44.5)	0.31 (7.9)	10000 (690)
1/2 NPT	3/4"-14	MIMPF X M 1	2.56 (63.5)	1.75 (44.5)	0.44 (11.1)	10000 (690)
1/2 NPT	1-3/8-12	MIMPF X M 1	3.06 (77.8)	1.75 (44.5)	0.56 (14.3)	10000 (690)

Dimensions are for reference only and subject to change without notice.

Warning for Your Safety


The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.



Female NPT Threads to Medium Pressure MP Coned and Threaded Nipples Adapter 15000psi



PConnection Type	PX Connection Type	Ordering Number	Dimension in(mm)			Working Pressure
			L	F	E	
1/8 NPT	1/4"-18	MIMPA 1	1.50 (38.1)	1.75 (44.5)	0.11 (2.8)	15000 (1034)
3/4 NPT	3/8"-24	MIMPA 2	1.75 (44.5)	1.75 (44.5)	0.20 (5.2)	15000 (1034)
1/8 NPT	9/16"-18	MIMPA 3	1.94 (49.2)	1.50 (38.1)	0.31 (7.9)	15000 (1034)
1/8 NPT	3/4"-16	MIMPA 4	2.13 (54.0)	1.50 (38.1)	0.31 (7.9)	15000 (1034)
1/8 NPT	1"-14	MIMPA 5	2.81 (71.4)	1.50 (38.1)	0.31 (7.9)	15000 (1034)
1/8 NPT	1/4"-28	MIMPA 6	1.75 (44.5)	1.37 (34.9)	0.11 (2.8)	15000 (1034)
1/4 NPT	3/8"-24	MIMPA 7	2.00 (50.8)	1.37 (34.9)	0.20 (5.2)	15000 (1034)
1/4 NPT	3/8"-24	MIMPA 8	2.19 (55.6)	1.37 (34.9)	0.31 (7.9)	15000 (1034)
1/4 NPT	3/4"-16	MIMPA 9	2.44 (61.9)	1.13 (28.6)	0.41 (10.4)	15000 (1034)
1/4 NPT	1"-14	MIMPA 10	2.94 (74.6)	1.13 (28.6)	0.41 (10.4)	15000 (1034)
3/8 NPT	3/8"-24	MIMPA 11	2.06 (52.4)	1.13 (28.6)	0.20 (5.2)	15000 (1034)
3/8 NPT	9/16"-18	MIMPA 12	2.25 (57.2)	1.13 (28.6)	0.31 (7.9)	15000 (1034)
3/8 NPT	3/4"-16	MIMPA 13	2.50 (63.5)	0.94 (23.8)	0.44 (11.1)	10000 (690)
3/8 NPT	1"-14	MIMPA 14	3.00 (76.2)	0.94 (23.8)	0.56 (14.3)	10000 (690)
3/4 NPT	9/16"-18	MIMPA 15	2.50 (63.5)	0.94 (23.8)	0.31 (7.9)	10000 (690)
3/4 NPT	3/4"-16	MIMPA 16	2.75 (69.9)	1.13 (28.6)	0.44 (11.1)	10000 (690)
1 NPT	1"-14	MIMPA 17	3.25 (82.6)	1.13 (28.6)	0.56 (14.3)	10000 (690)
1 NPT	9/16"-18	MIMPA 18	2.56 (65.1)	0.63 (15.9)	0.31 (7.9)	10000 (690)
1/4 NPT	3/4"-16	MIMPA 19	2.81 (71.4)	0.63 (15.9)	0.44 (11.1)	10000 (690)
1/2 NPT	1"-14	MIMPA 20	3.39 (86.0)	0.63 (15.9)	0.56 (14.3)	10000 (690)
1/2 NPT	3/4"-16	MIMPA 21	3.13 (79.4)	0.87 (22.2)	0.44 (11.1)	10000 (690)
1/2 NPT	1"-14	MIMPA 22	3.63 (92.2)	1.13 (28.6)	0.56 (14.3)	10000 (690)




Female NPT Threads to High Pressure HP Male Adapter 40000 psi

PConnection Type	PX Connection Type	Ordering Number	Dimension in(mm)			Working Pressure
			L	F	E	
1/4 NPT	9/16-8	MIHPF 1	1.19 (30.2)	0.63 (15.9)	0.08 (2.1)	15000 (1034)
3/8 NPT	3/4"-16	MIHPF 2	1.37 (34.9)	0.81 (20.6)	0.13 (3.2)	15000 (1034)
3/4 NPT	1-1/8-12	MIHPF 3	1.63 (41.3)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
1 NPT	9/16-8	MIHPF 4	1.37 (34.9)	0.94 (23.8)	0.08 (2.1)	15000 (1034)
1/4 NPT	3/4"-16	MIHPF 5	1.63 (41.3)	0.94 (23.8)	0.13 (3.2)	15000 (1034)
1/4 NPT	1-1/8-12	MIHPF 6	1.75 (44.5)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
3/8 NPT	9/16-8	MIHPF 7	1.44 (36.5)	1.19 (30.2)	0.08 (2.1)	15000 (1034)
3/8 NPT	3/4"-16	MIHPF 8	1.69 (42.9)	1.37 (34.9)	0.13 (3.2)	15000 (1034)
3/4 NPT	1-1/8-12	MIHPF 9	1.81 (46.0)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
3/4 NPT	9/16-8	MIHPF 10	1.69 (42.9)	1.37 (34.9)	0.08 (2.1)	15000 (1034)
1 NPT	3/4"-16	MIHPF 11	1.94 (49.2)	1.50 (38.1)	0.13 (3.2)	15000 (1034)
1 NPT	1-1/8-12	MIHPF 12	2.13 (54.0)	1.50 (38.1)	0.19 (4.8)	15000 (1034)
1/8 NPT	9/16-8	MIHPF 13	1.75 (44.5)	1.50 (38.1)	0.08 (2.1)	10000 (690)
1/8 NPT	3/4"-16	MIHPF 14	2.00 (50.8)	1.75 (44.5)	0.13 (3.2)	10000 (690)
1/8 NPT	1-1/8-12	MIHPF 15	2.19 (55.6)	1.75 (44.5)	0.19 (4.8)	10000 (690)
1/2 NPT	9/16-8	MIHPF 16	2.00 (50.8)	1.13 (28.6)	0.08 (2.1)	10000 (690)
1/2 NPT	3/4"-16	MIHPF 17	2.25 (57.2)	1.13 (28.6)	0.13 (3.2)	10000 (690)
1/2 NPT	1-1/8-12	MIHPF 18	2.44 (61.9)	1.75 (44.5)	0.19 (4.8)	10000 (690)



Female NPT Threads to High Pressure Coned and Threaded Nipples

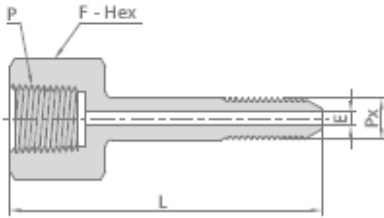

PConnection Type	PX Connection Type	Ordering Number	Dimension in(mm)			Working Pressure
			L	F	E	
1/4 NPT	9/16-8	MIHPF 1	1.19 (30.2)	0.63 (15.9)	0.08 (2.1)	15000 (1034)
3/8 NPT	3/4"-16	MIHPF 2	1.37 (34.9)	0.81 (20.6)	0.13 (3.2)	15000 (1034)
3/4 NPT	1-1/8-12	MIHPF 3	1.63 (41.3)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
1 NPT	9/16-8	MIHPF 4	1.37 (34.9)	0.94 (23.8)	0.08 (2.1)	15000 (1034)
1/4 NPT	3/4"-16	MIHPF 5	1.63 (41.3)	0.94 (23.8)	0.13 (3.2)	15000 (1034)
1/4 NPT	1-1/8-12	MIHPF 6	1.75 (44.5)	1.19 (30.2)	0.19 (4.8)	15000 (1034)
3/8 NPT	9/16-8	MIHPF 7	1.44 (36.5)	1.19 (30.2)	0.08 (2.1)	15000 (1034)
3/8 NPT	3/4"-16	MIHPF 8	1.69 (42.9)	1.37 (34.9)	0.13 (3.2)	15000 (1034)
3/4 NPT	1-1/8-12	MIHPF 9	1.81 (46.0)	1.37 (34.9)	0.19 (4.8)	15000 (1034)
3/4 NPT	9/16-8	MIHPF 10	1.69 (42.9)	1.37 (34.9)	0.08 (2.1)	15000 (1034)
1 NPT	3/4"-16	MIHPF 11	1.94 (49.2)	1.50 (38.1)	0.13 (3.2)	15000 (1034)
1 NPT	1-1/8-12	MIHPF 12	2.13 (54.0)	1.50 (38.1)	0.19 (4.8)	15000 (1034)
1/8 NPT	9/16-8	MIHPF 13	1.75 (44.5)	1.50 (38.1)	0.08 (2.1)	10000 (690)
1/8 NPT	3/4"-16	MIHPF 14	2.00 (50.8)	1.75 (44.5)	0.13 (3.2)	10000 (690)
1/8 NPT	1-1/8-12	MIHPF 15	2.19 (55.6)	1.75 (44.5)	0.19 (4.8)	10000 (690)
1/2 NPT	9/16-8	MIHPF 16	2.00 (50.8)	1.13 (28.6)	0.08 (2.1)	10000 (690)
1/2 NPT	3/4"-16	MIHPF 17	2.25 (57.2)	1.13 (28.6)	0.13 (3.2)	10000 (690)
1/2 NPT	1-1/8-12	MIHPF 18	2.44 (61.9)	1.75 (44.5)	0.19 (4.8)	10000 (690)

Dimensions are for reference only and subject to change without notice.

Warning for Your Safety

The system designer and user have the sole responsibility to select products suitable for their special application requirements to ensure the proper installation. Operation and maintenance of the product. Application details, material compatibility and product ratings should all be considered in the individual selection. Improper selection or use of products can cause property damage or personal injury. METALOK accepts no liability for any improper selection, installation, operation or maintenance.

Our Total customer satisfaction results in A True Partnership.



CUSTOMER BASE

More than three decades of experience, expertise and dedication ensures world class quality and excellent performance of METALOK products resulted in establishing worldwide customer base.

GRATITUDE


We at METALOK always appreciated and thankful to all our Valued Customers for undaunted support and faith reposed on us which motivates us to perform better all the time

EDGE

Our in-house Design, manufacturing and Testing facilities only emphasizes that METALOK Fitting and Valves are one of the Best, versatile, safe, compatible, easy for installation and operation in Instrumentation, Hydraulic and Industrial applications.

OUR GOAL

Our company's vision is to understand our customers requirements and meet them fully to their entire satisfaction by way of high quality, timely delivery, competitive price and prompt service.

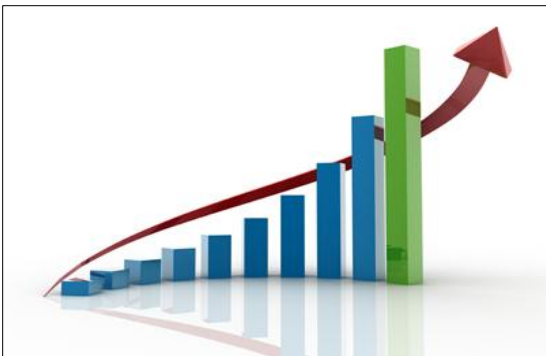

www.metalokindustries.com



METALOK INDUSTRIES
(AN ISO 9001: 2008 Certified Company)

Regd Office & Unit : G-16 & 21, Nikisha Industrial Estate , Near Pandurang wadi, Western Express Highway, Mira Road East, Thane 401 107.



+91 22 28453235
+91 9869552950 (Hassan Shaikh)
+91 9892277161 (Rehan Shaikh)



metalokindustries@gmail.com
sales@metalokindustries.com
metalok@live.com



www.metalokindustries.com

METALOK INDUSTRIES

sales@metalokindustries.com



M
E
T
A
L
O
K

I
N
D
U
S
T
R
I
E
S